



# HOSHIZAKI AMERICA, INC.

## SERVICE BULLETIN

**SB09-0006**


**May 29, 2009**

**Page 1 of 1**

### **Subject: Installation Clearances for KM-201/260B\_H**

The KM-201B & 260B\_H have now been released.

This series fills the gap vacated by the KM-255B\_H model. Although they can be installed under a cabinet, it is important to note that there are 2 Air intakes with filters...a right front filter louver and a right side filter louver. The air exits from the left front on both models and some from the rear on the KM-260B. The minimum required clearance on the right side is 2" however if available, more clearance is better so that you have easier access to remove the filter for cleaning. The left side and top clearance should be a minimum of 0.6" so that the unit can be easily removed for service and maintenance.

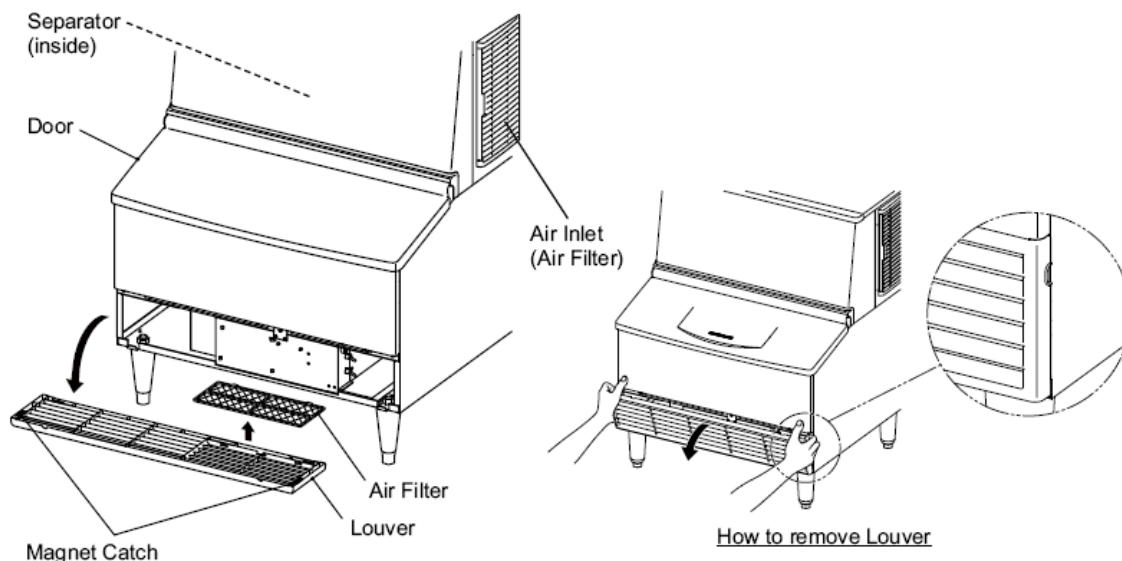

If you have any questions regarding this information please contact technical support department at: 1-800-233-1940.