



HOSHIZAKI AMERICA, INC.

SERVICE BULLETIN

SB20-0010R1

Issued May 5, 2020

Revised June 4, 2020

Page 1 of 1

Subject: RST55C1E compressor protector change (4A4376-01)


The compressor manufacture of the RST55C1E compressor will be changing their design from an external protector to an internal compressor.

As part of the change Hoshizaki will be changing the part number from 4A4376-01 (External protector) to 4A4376-02 (Internal protector). Part number 4A4376-01 and 4A1726-37 will sub to 4A4376-02 when inventory is depleted.

This change affects previous models, DCM-750B_H(-OS), DKM-500B_H, KM-515M_H, KM-600MAH, KMD-530M_H, KML-451MWH, PTR2SSB-XXXX and RH3SSB-XX. As well as the current models shown below.

Model	Planned implementation date
KMD-530MAJ	9-1-20
KMD-530MRJ	9-1-20
KMD-530MWJ	9-1-20
KML-500MWJ	9-1-20
DCM-752BAH(-OS)	5-1-20
DKM-500BWJ	9-1-20

In the event you are replacing an externally protected compressor with an internally protected compressor simply eliminate the protector and wire the compressor as shown below.

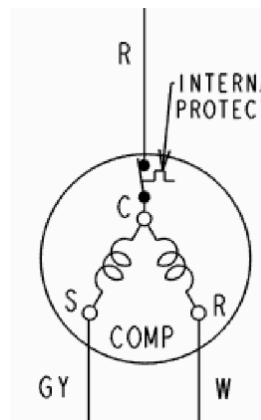

If you have any questions concerning this change, please contact the Technical Support Department at tech-support@hoshizaki.com or 1-800-233-1940.