



# HOSHIZAKI AMERICA, INC.

## SERVICE BULLETIN

SB15-0002

Issued: March 10, 2015

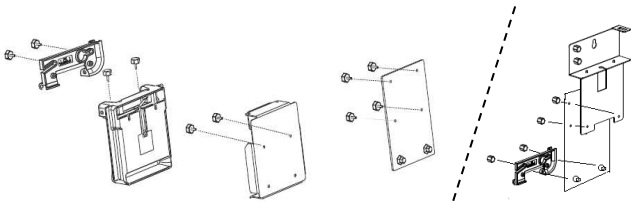


Page 1 of 2

### SUBJECT: Bin Control Extension Brackets




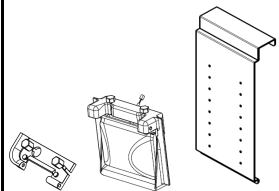

Various bin control extension brackets are available for special applications. These may be necessary in certain applications to reduce ice meltage around the bin control causing an ice cavity or to lower storage capacity which can occur in applications with low usage and in dispenser applications. While most extensions are special order parts, some models include an extension bracket specifically for use on dispenser applications.

The type of bin control will depend on the ice maker model. The extension brackets can be used with Thermostatic Bin Controls (TBC) or Mechanical Bin Control (MBC) as noted.

### Application chart for extension brackets:

Part number	Application	Control Height	Illustrations/uses
1. HS-0239 > Standard on 22" KM models	Dispenser or low usage on bin. For use with MBC or TBC.	Adjust to 3" below unit. (ABS)	 <p>HS-0239 can be used with MBC or TBC.</p> <p>Example of HS-0239 used on KM-1340M</p>
2. 3A7049-01 > Optional for use on KM Modular units.	Longer HS-0239 for dispenser or low usage on bin. For MBC or TBC.	Adjust to 6" below unit. (Stainless)	 <p>3A7049-01 can be used with MBC or TBC.</p>
3. 4A4633-01 or HS- 0239 > Optional	For 2 > KM- 1340/1601M mounted on upright bin. For TBC only.	Lowers control 3" to reduce ice cavity (4A4633-01 is Stainless)	 <p>4A4633-01 used with TBC only.</p>

**Application chart for extension brackets continued:**

Part number	Application	Control Height	Illustrations/uses
4. HS-0207 > Standard on certain KMD/KMS models. Optional for DKM and other models.	Dispenser or low usage on bin. For T-stat only. For MBC only.	Adjust to 3" below unit. (Stainless)	 <p>HS-0207 for MBC only.</p>
5. HS-5062 > Optional	Longer HS-0207 for dispenser or low usage on bin. For MBC only.	Adjust to 6" below unit. (Stainless)	 <p>HS-5062 is 3" longer than HS-0207 and for MBC only.</p>
6. HS-0246 / 3A5210-02 KM-901M only.> Optional	Low usage on bin. For MBC only.	Adjust to 6" below unit. (Stainless)	 <p>HS-0246 is 3" longer than the KM-901M bracket and for MBC only.</p>
7. 3A8319-01 > Optional	Used to relocate TBC or MBC on special dispenser applications or for low usage on bins.	Adjustable down to 10"... Hangs on side of bin. (Stainless)	 <p>3A8319-01 is universal for MBC &amp; TBC.</p>
8. 3A0408-01 > Standard on all 48" stackable units.	Drop down bracket used on "S" models for TBC	Eliminates ice backup on "S" models.	 <p>3A0408-01 is standard for all "S" models. For use with TBC.</p>

Order the brackets by part number through the Hoshizaki service parts department. Note that these brackets are designed to address special application problems that generally result in ice back up, bridging or freeze up calls and are not considered as normal warranty.

If you have any questions please contact Technical Support at [Techsupport@hoshizaki.com](mailto:Techsupport@hoshizaki.com) or 1-800-233-1940.

