



HOSHIZAKI AMERICA, INC.

SERVICE BULLETIN

SB94-0004

March 24, 1994

SUBJECT: DISCONTINUED PARTS


Listed below are two fan motors for the older KM series units which are no longer available from the manufacturer. These parts will substitute as shown in the chart below.

If a replacement fan motor is ordered, the fan blade must be replaced at the same time due to a difference in the motor shaft size. An additional new bracket must be ordered for the S-0466 remote condenser application.

<u>MODEL NUMBER</u>	<u>OLD FAN MOTOR PART NUMBER</u>	<u>NEW PART NUMBERS MOTOR/BLADE/BRACKET</u>
KM-451DU	2U0064-01	2U0090-01/421462-01/-----
KM-601D	"	" " "
KM-631DU	"	" " "
KM-1201DU	"	" " "
S-0466	2U0064-02	2U0090-02/417068-01/-----
S-0454	"	2U0090-02/417068-01/318052G02

Order replacement parts per model number as listed above.

The new fan motor has 4 leads and should be wired according to the following diagram.

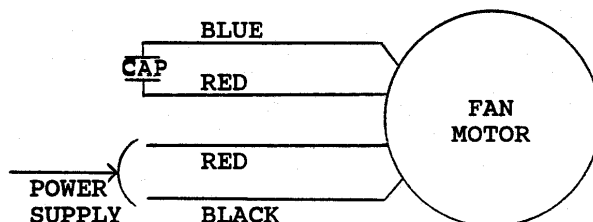

NOTE: The red leads are interchangeable

DM/ss