F-822M_K(-C)

Modular Ice Machine
Slim-Line Series

F-822MAK F-822MAK-C

F-822M_K(-C)
11/05/26
Item # 13037K

Item #: _____

Project: _____

Qty: _____

AIA#: _____

W x D x H
22" x 24" x 26"

F-822MAK★
Air-Cooled Flaker
shown on B-500SF bin

F-822MAK-C★
Air-Cooled Cubelet

F-822MWK
Water-Cooled Flaker

F-822MWK-C
Water-Cooled Cubelet

★ ENERGY STAR





F-822MAK-C
shown with 24"
Lancer Dispenser

LANCER

Features

- **Advanced CleanCycle24™ design** (ADVANCED 24 CleanCycle)
- **Environmentally friendly R290 hydrocarbon refrigerant**
- **Stainless steel auger with greaseless bearing**

- Durable stainless steel exterior
- Flaker - Up to 750 lbs. of ice production per 24 hours
- Cubelet - Up to 653 lbs. of ice production per 24 hours
- Mount two units, side-by-side, in only 44" of floor space for double the amount of ice production
- 2 second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Ultrasonic sensor opening

Available on Bins:

B-250SF	**B-500SF**	**B-800SF**
B-300SF	**B-700SF**	**B-900SF**

*Top kit may be required. See Bin Spec Sheets. *Two unit application only.*

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 28" x 26.75" X 32" Volume: 13.9ft³


NSF · AHRI CERTIFIED · UL CERTIFIED SA10203 · NATURAL REFRIGERANT · GEORGIA MADE · FACTORY WARRANTY Parts & Labor 3 YR Entire Machine Parts 5 YR Compressor · kcl AQ

Condenser	Model	ICE PRODUCTION Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	WATER USAGE Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	ELECTRICAL kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	F-822MAK	750	560	12.0	N/A	3.95	20A	9.7A	115V/60/1	3	6,400	5.3 oz.	181 / 190
Water	F-822MWK	680	565	12.0	120	3.60	20A	8.1 A	115V/60/1	3	5,700	5.3 oz.	181 / 190
Air	F-822MAK-C	653	525	12.0	N/A	4.45	20A	9.7A	115V/60/1	3	6,400	5.3 oz.	181 / 190
Water	F-822MWK-C	647	550	12.0	120	3.80	20A	8.1 A	115V/60/1	3	5,700	5.3 oz.	181 / 190


Power cord not included. Must be hard-wired at site.

Cube Dimensions*

Flaked F-822M_K



Cubelet F-822M_K-C



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 108-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear and sides, and 24" (61 cm) clearance at top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com


F-822M_K(-C)

Modular Ice Machine
Slim-Line Series


F-822M_K(-C)
11/05/26
Item # 13037K

mm
[inch]

FRONT VIEW




AIR-COOLED




WATER-COOLED

SIDE VIEW

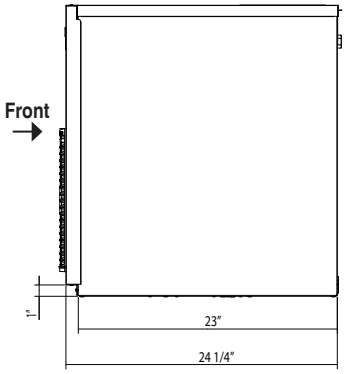


AIR-COOLED

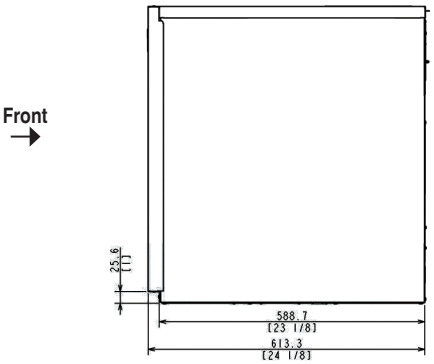


WATER-COOLED

REAR VIEW

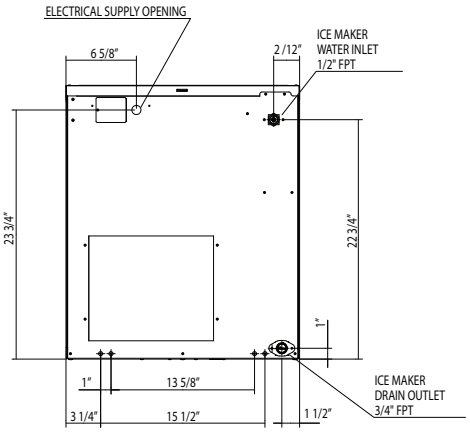


AIR-COOLED

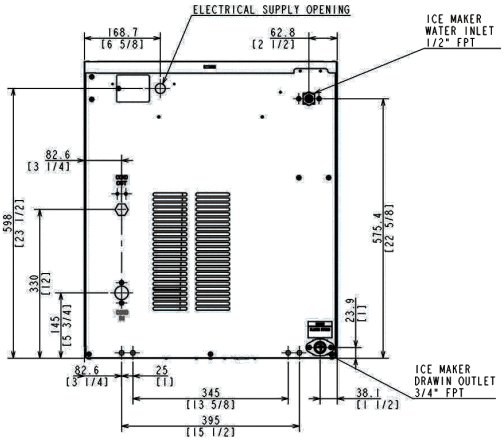


WATER-COOLED

BOTTOM VIEW

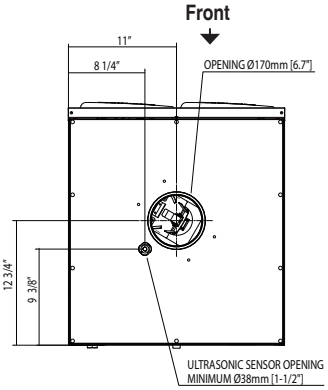

AIR-COOLED

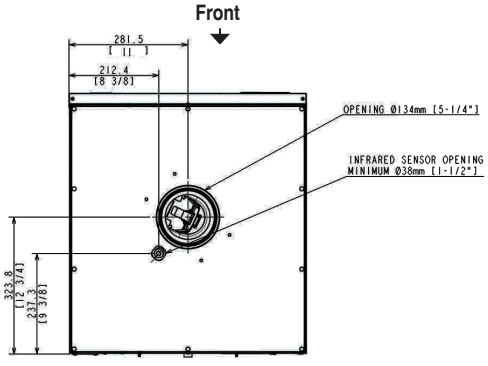

WATER-COOLED

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com