



FM-49-HC

Glass Door Freezer Merchandiser with Swing Door



FM-49-HC
02/13/26
Item # 13573

W x D x H
60" x 29.75" x 79.5"



Item #: _____
 Project: _____
 Qty: _____
 AIA#: _____

Features

- ▶ Flat vertical corners with silver painted galvanized steel exterior and interior with NSF approved white steel interior and stainless steel floor
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Energy saving hot gas loop on front edge of cabinet helps prevent condensation

- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled products.
- Heated glass doors prevent condensation and allow for operation in higher ambient temperatures
- (5) white epoxy coated shelves per section with product stops are standard
- Automatic energy saving hot gas loop on front edge of refrigeration compartment helps prevent condensation particularly in hot humid environments
- LED illuminated exterior canopy
- Energy efficient vertical LED interior lights illuminate products on display
- Door is mounted on heavy duty hinges with self-closing mechanism
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 9 Foot cord and plug
- 2 inch leveling legs standard

Container Qty: 14



Dimensions / Capacity

	Two Section FM-49-HC
Interior Storage Capacity (CF)	42.61 ft ³
Overall Width x Depth	60" x 29.75"
Height	79.5"
Depth with Door Open	58"
Adjustable Shelves	5 per section
Shelf Dimensions (W x D)	27.25 x 21.75"
Crated Shipping Weight	665.8 lbs.
Crated Width x Depth x Height	63" x 32.5" x 85.25"

Electrical / Refrigeration

	Two Section FM-49-HC
Voltage	115/60/1
HACR Breaker	15 amps
Electrical Connection (NEMA)	5-15P ⚡
Voltage Range	115-127V
Ambient Temp. Range	45°F to 100°F
Control Setpoint Range	-10° to 0°F
Amperage	8.8
Energy Consumption (kWh/day) @ASHRAE	12.24
Approx. Nominal Compres. BTU/HR (HP)	3084(1/2HP)
Refrigerant / Charge Amount (oz)	R290 / 5.78oz.

Options

- Price tag holder (HS-5296)
- 4" Casters (HS-5288)

Warranty

- * 3 Year - Parts and Labor on entire machine.
 - 5 Year - Parts on Compressor
- Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




FM-49-HC


Glass Door Freezer Merchandiser with Swing Door

FM-49-HC
02/13/26
Item # 13573

FRONT VIEW

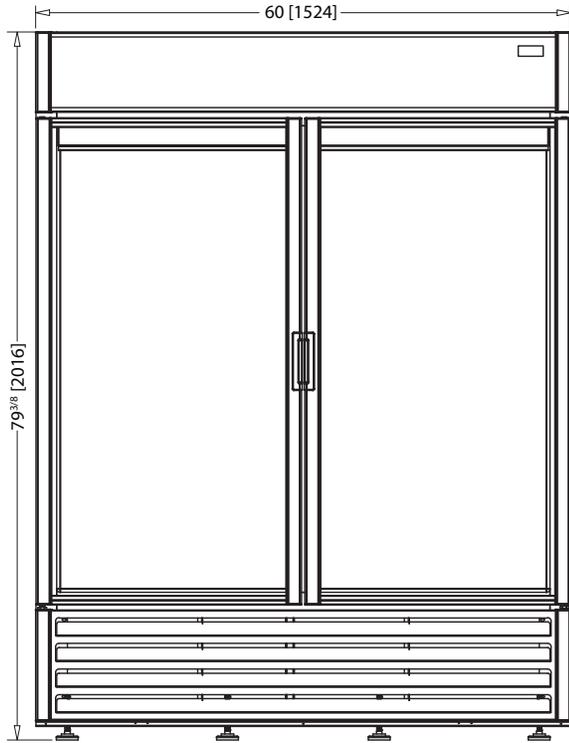


SIDE VIEW

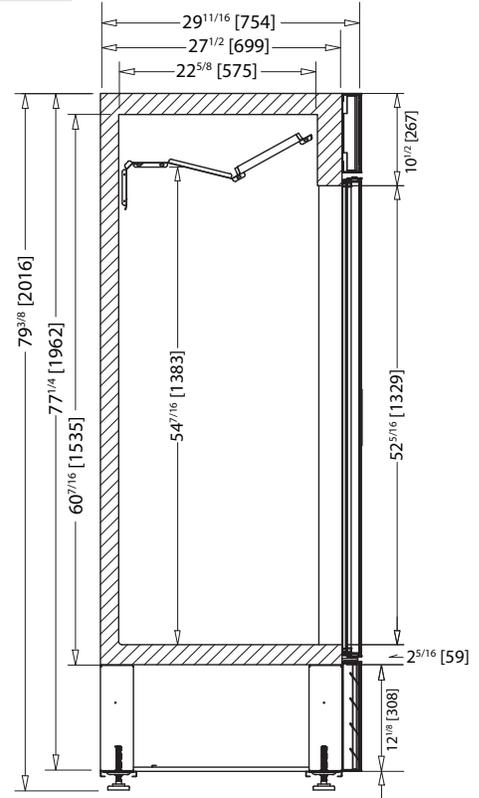


inch [mm]

PLAN VIEW

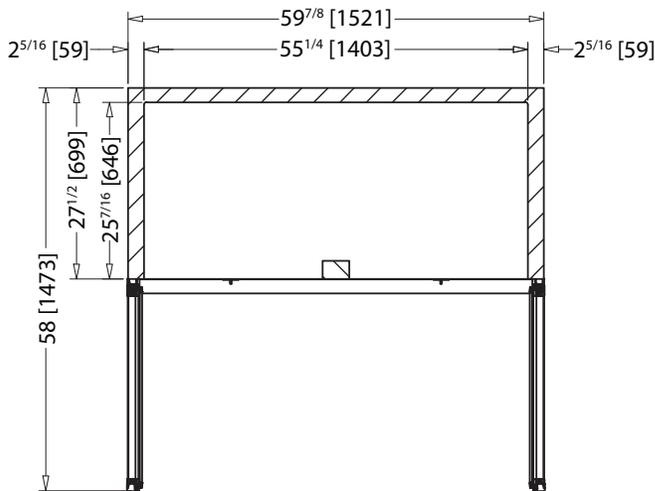

HEADER DIMS

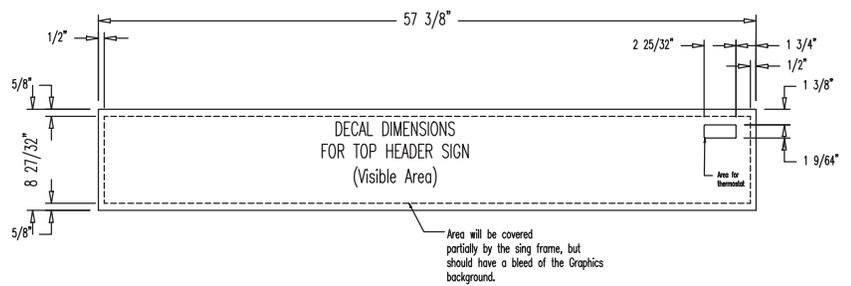

Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers) (or your sign company file type requirements)
- Include a full color print out

Material Requirements:

- Thickness: 1/16" (1.5mm)
- Good- Acrylic/Pexiglass, Better - high impact acrysteel, acrylite SG
- Best- Super impact Lexan, Lexan SG Polycarbonate

Note: Texts and important parts of the image should be within the visible area. The visible area is illustrated by dotted lines when it applies.