



# HOSHIZAKI HX Series

# HXR1A/2A-FG

Full Glass Door  
Laboratory/Pharmacy Refrigerator



HXR1A/2A-FG  
09/16/25  
Item # 13599




**HXR1A-FG**



**HXR2A-FG**

#### Monitoring display with user-friendly interface

- o 7-inch capacitive multi-touch digital display is user-programmable with temperature in °C or °F
- o Intuitive event and data logging capability with easy download via convenient, front access USB port

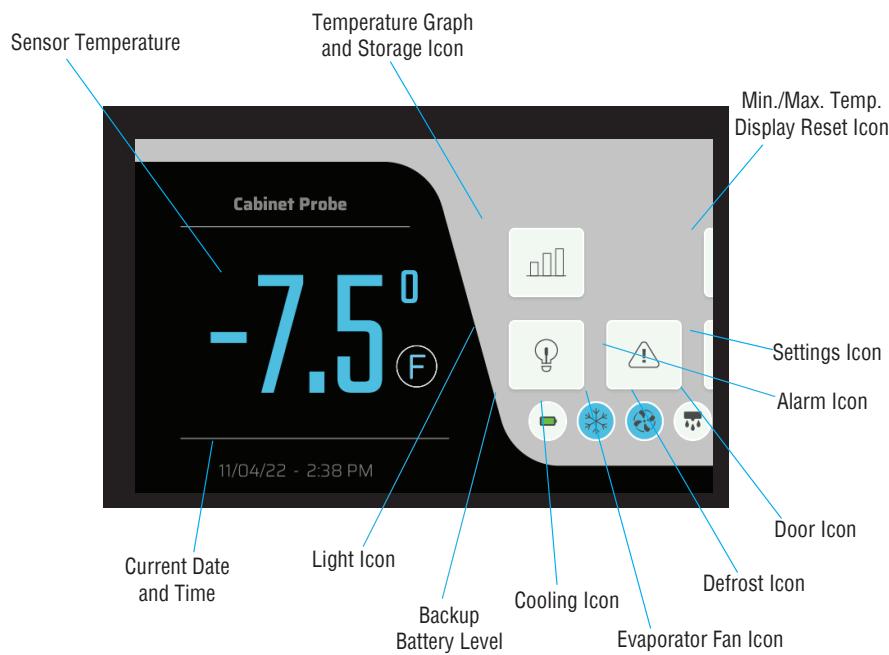

- **Designed for performance**

- o Modular refrigeration system with microprocessor controller provides reliable performance
- o Thermostatic Expansion Valve (TXV) system quickly and effectively regulates refrigerant flow to control temperatures
- o Unique ducted air distribution system maintains uniform temperature for consistent cabinet temperatures at each shelf level
- o Auto-evaporating condensate pan means no overflow or mess

- **Durable construction**

- o Stainless steel interior and exterior front, sides and top provide resistance to rust and corrosion and is easy to clean
- o Evaporator coils are epoxy electrocoated to help fight corrosion
- o Heavy duty, easy to roll casters (two with locks)

- **Energy efficient and sustainable**

- o Energy star certified (excluding 2 glass door models)
- o Energy efficient LED lights (full length on glass-door models)
- o Environmentally friendly R290 hydrocarbon refrigerant
- o 2 3/8" of CFC-free foamed in place insulation

- **Product Safety**

- o Audible and visual alarms for high/low temperature, door open, power failure, and low battery
- o Dry contacts for remote alarming
- o Standard access port for third party temperature monitoring

- **Heavy-duty door(s) for ease of use**

- o Multi-pane argon filled glass doors are energy efficient
- o ADA-compliant full-length flush mount handles
- o Self-closing doors stay open at 90 degrees for easy product loading
- o Heavy-duty stainless steel hinges
- o Locks standard on all doors



# HXR1A/2A-FG

HXR1A/2A-FG  
09/16/25  
Item # 13599

## HXR1A-FG

## HXR2A-FG

### Interior

Height	60.24"
Shelf-dimensions (WxDxH)	21.25" x 26.00"
Nominal capacity	23.10 ft <sup>3</sup>

### Exterior

W x D x H (height with 4" casters)	27.5" x 34.5" x 79.5"	55" x 33.5" x 79.5"
Door Opening (WxH)	21.75" x 59.25"	
Clearance	Side: 0" Top: 0" Rear: 3"	
Field reversible doors		

### Electrical

Voltage	115V/60/1
HACR/Breaker	15.0 Amps
Voltage Range	104-126V
Electrical Connection (NEMA)	5-15P
• 10 ft. cord/hospital grade plug	
Ambient Temp. Range	45°F-80.6°F / 7.2°C - 27°C
Control Set Point Range	31°F-52°F / -0.56°C - +11.1°C

### System performance

Amperage	5	8
Energy consump. (kWh/day) @ASHRAE/Energy Star®	1.25/(2.43)	3.47
Heat rejection (BTU/Hr.) @NSF/Energy Star®	317/(639)	513
Approx. nominal compres. BTU/HR(HP)	770(1/4HP)	1545(1/2HP)
Refrigerant / charge amount	R290/(4.6oz)	R290/(4.9oz)

### Shipping

Shipping size (L x W x H)	35.5" x 31.5" x 81"	58" x 37.5" x 81"
Approximate shipping weight	357 lbs.	586 lbs.

### Alarming

High and low product temperature alarm	audible and visual, user programmable set points in F° or C°
Power failure alarm	audible and visual
Door ajar alarm	audible and visual
Probe error alarm	probe errors are detected by MC controller
Alarm volume	0-10 scale
Low battery alert	audible and visual
Back-up battery status	shows voltage level
Temperature log	settable continuous recording of data
Remote contacts	No/NC standard, located behind front panel

### Warranty

3 Year - parts and Labor on entire machine. 5 Year - Parts on Compressor. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Hoshizaki reserves the right to change specifications without notice.

### Data logging

Information log graphs or displays temperature data and displays chronological event data up to 3 months of data.

Data export USB export capabilities

### Controls

Temperature display	7" LCD capacitive touchscreen digital temperature display available in user-programmable F° or C°
Information log	up to 3 months of data/ 170,661 records
3rd party probe access	bottom lower left rear of cabinet; co-molded liquid tight plug (nylon & elastomer) which can be pierced by round wire
Product temperature display probe	(1) hard wired (±0.7°F , ±0.4°C)
Temperature probe calibration	top probe calibration in 0.1° increments
Password protection PIN	4-digit password to prevent interface setting/selection changes
Date and time	programmable
Product simulation bottle size	20ml
Refrigeration and defrost probes	NTC thermistor type
Refrigeration cycle with probe error	multiple detection functions
Programmable operating range	31°F - 52°F / -0.56°C - +11.1°C
Factory preset	38°F / 3.3°C

