



# PR93B-D2/-D4

93" Pizza Prep Table with Two Doors and Two Drawers or Four Drawers and One Door



PR93B-D2/-D4  
06/27/25  
Item #13670

**W x D x H**

93" x 33.25" x 43.25"\*\*  
\*to work surface with 6" casters



PR93B-D2

PR93B-D4



## Dimensions / Capacity

**Interior Storage Capacity (CF) (AHAM)**

## Three-Section PR93B-D2/-D4

29.3ft<sup>3</sup>

**Overall Width x Depth**

93" x 33.25"

**Height (including 6" casters)**

43.25"

**Depth with Cutting Board Installed (including 1" bumper)**

36.25"

**Door Opening Width x Height**

22.5" x 23"

**Depth with Door Fully Open (including 1" bumper)**

57.75"

**Depth with Drawer Fully Open (including 1" bumper)**

57.5"

**Adjustable Shelves**

4 / 2

**Shelf Dimensions (W x D)**

24.75" x 25.5"

**Pan Capacity (# of 1/3rd size x 4" deep)**

12

**Maximum Pan Depth**

6"

**Crated Weight**

620 / 675 lbs.

**Crated Length x Width x Height**

96.75" x 35.75" x 45"

## Electrical / Refrigeration

**Voltage**

## Three-Section PR93B-D2/-D4

115/60/1

**HACR Breaker**

15.0 Amps

**Electrical Connection (NEMA)**

5-15P (1)

**Voltage Range**

104-126

**Ambient Temp. Range**

45° to 100°F

**Control Setpoint Range**

16° to 36°F (rail) / 28° to 40°F (cabin)

**Amperage**

6

**Energy Consumption (kWh/day) @NSF**

7.31

**Heat Rejection (BTU/Hr.) @NSF**

1039

**Approx. Nominal Compress. BTU/HR (HP)**

3418(1/2HP)

**Refrigerant / Charge Amount (oz)**

R290 (2.7 oz)

## Options

- 2" Casters (HS-5037, set of 4)
- 4" Casters (HS-5320, set of 4)
- Foot pedal kit (HS-5555, Lft hinge)
- Foot pedal kit (HS-5556, Rt hinge)
- Door locks (factory request)
- Rail dividers Reversible door (field reversible)

- Overshelves (HS-5229 single, need 2)
- Overshelves (HS-5228 double, need 2)
- Drawer divider bar (HS-4007, Vertical)
- Addtl. Epoxy Shelves (HS-5151, 1pk)
- Addtl. Stainless Shelves (HS-5153,1pk)
- Stainless steel back panel (factory request)



Seven year warranty  
on labor, parts, and  
compressor. Valid in  
United States, Canada,  
Puerto Rico and U.S.  
Territories.

For more information, please visit  
[hoshizakiamerica.com/support/warranty/](http://hoshizakiamerica.com/support/warranty/)

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle.  
Hoshizaki reserves the right to change specifications without notice.

FAX 800-345-1325 | [www.hoshizakiamerica.com](http://www.hoshizakiamerica.com)




# PR93B-D2/-D4

93" Pizza Prep Table with Two Doors and Two Drawers  
or Four Drawers and One Door


STEELHEART

PR93B-D2/-D4  
06/27/25  
Item #13670

## FRONT VIEW

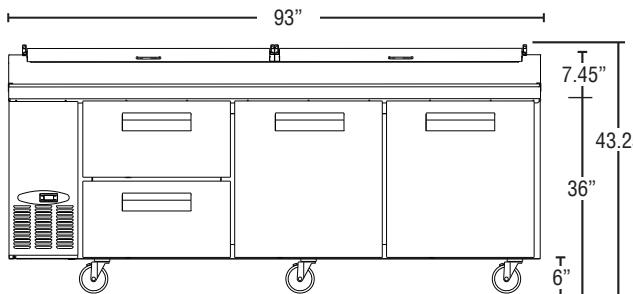


PR93B-D2

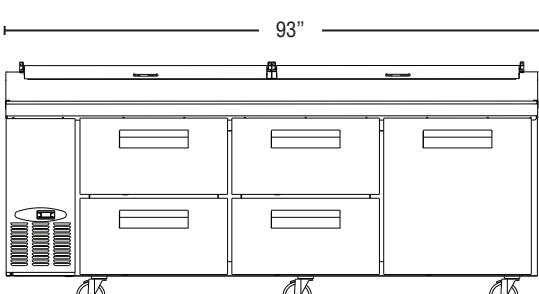


PR93B-D4

## SIDE VIEW

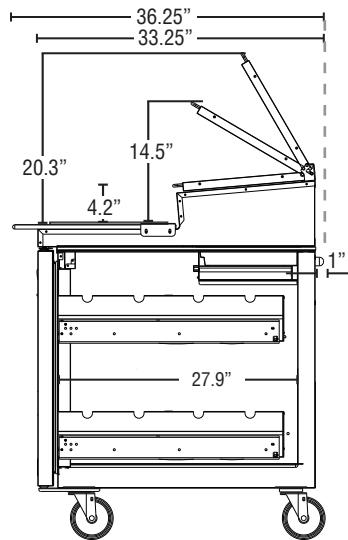


## PLAN VIEW

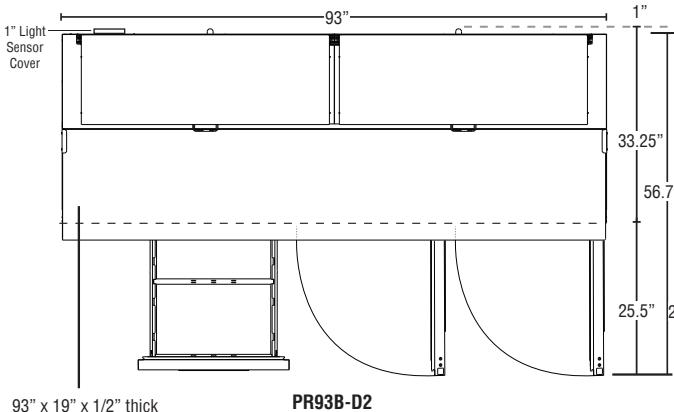

93" x 19" x 1/2" thick  
Cutting board

PR93B-D2

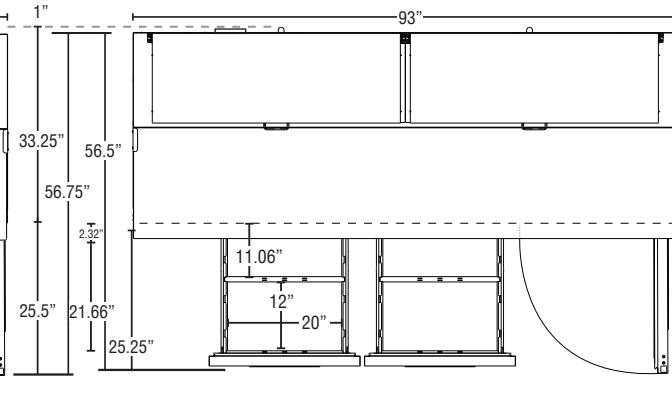

PR93B-D4



Horizontal bar comes  
standard with model  
(HS-5691)

### Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior back and sides are stainless steel with an ABS ceiling and stainless steel floor. Mounted on anodized aluminum pilasters the shelves are adjustable in 1/2" increments. Cabinet walls and doors are insulated with 2" of foamed in place polyurethane. 6" polyolefin stem casters (two with brakes) are standard. The raised refrigerated rail is constructed of stainless steel interior and exterior (except back is galvanized steel). The rail is air cooled and utilizes a unique patent pending ducted air distribution system to distribute air evenly and maintain product temperature at safe levels. The rail will accommodate 1/6th, 1/3rd, 1/2 and full size pans 6" deep. Pans are located 1.5" below the front of the rail to assist in access to food product. An insulated, stainless steel, one piece hinged, lid is standard. Pizza preparation table is supplied with a 93" x 19" x 1/2" thick N.S.F. approved white polyethylene cutting board.

### Drawer Construction

Drawer fronts are constructed of high grade stainless steel inside and out and are insulated with R-134a CFC free foamed in place polyurethane. Each drawer accommodates (2) 12" X 20" X 6" deep pans (pans by others). Drawer module frames are formed of 16 gauge stainless steel all welded construction and securely fastened in the cabinet. The drawer slides are constructed of 14 gauge stainless steel with delrin nylon rollers to prevent metal to metal contact between the drawer slides and help reduce wear. The drawer slides have a dynamic load capacity of 250 pounds. Drawers are provided with a one-piece extruded aluminum flush mount handle. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning.

### Door Construction

Door is constructed of high grade stainless steel exterior with an ABS interior liner. Hoshizaki's exclusive "stepped" design protects the recessed gasket while product is removed from the cabinet. Door is provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing door is equipped with a stay open feature past 90 degrees. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Field reversible door hinging is standard.

### Refrigeration System

Front breathing refrigeration system allows unit to be built into any enclosure with zero clearance at the side or rear. The high efficiency refrigeration system is self-contained with an epoxy electrocoat (E-Coat) evaporator coil for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Unit uses a heated, time initiated defrost to eliminate any ice on the evaporator coil. An innovative ducted air distribution system distributes air evenly around food product in the rail. Engineered to maintain NSF-7 temperatures in 100°F ambient. (Certified to NSF-7 temperatures in 86°F ambient.) Pizza preparation tables are supplied with a full complement of N.S.F. approved polycarbonate plastic, 1/3rd size pans, 4" deep and stainless steel adapter bars. 115 volt units are equipped with a ten foot cord and NEMA rated plug (20.0 amps or less).