



UR60B-LPD2

Undercounter 60" Low Profile Refrigerator
with One Door and Two Drawers

W x D x H
60" x 30" x 31.9"
*with 2.25" casters



UR60B-LPD2
10/29/24
Item # 13717

Item #: _____
Project: _____
Qty: _____
AIA#: _____



Intertek



Intertek



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)	Two-Section UR60B-LPD2
Overall Width x Depth (including 1" bumper)	15.1 ft ³
Height (including 2.25" casters)	60" x 31"
Drawer Opening Width x Height	31.9"
Depth with Door Fully Open (including 1" bumper)	25.5" x 23"
Depth with Drawer Fully Open (including 1" bumper)	57.5"
Adjustable shelves / Shelf Dimensions (W x D)	51"
Crated Weight	2 / 27.25" x 16"
Crated Length x Width x Height	292 lbs.
	62.5" x 34" x 35.5"

Electrical / Refrigeration

Two-Section UR60B-LPD2
Voltage
HACR Breaker
Electrical Connection (NEMA)
Voltage Range
Ambient Temp. Range
Control Setpoint Range
Amperage
Energy Consumption (kWh/day) @ASHRAE
Heat Rejection (BTU/Hr.) @NSF
Approx. Nominal Compre. BTU/HR (HP)
Refrigerant / Charge Amount (oz)

Options

- 4" Casters (HS-5035, set of 4)
- 6" Casters (HS-5036, set of 4)
- Door locks (factory request)
- Foot pedal kit (HS-5555, Lft hinge)
- Foot pedal kit (HS-5556, Rt hinge)
- Stainless steel back panel (factory request)
- Overshelves (HS-5174 single)
- Overshelves (HS-5165 double)
- Drawer divider bar (HS-4007, vertical)
- Drawer divider bar (HS-5433 horizontal)
- Addtl. Epoxy Shelves (HS-5108, 1pk)
- Addtl. Stainless Shelves (HS-5118,1pk)



Valid in United States, Canada, Puerto Rico and U.S. Territories. *Please visit hoshizakiamerica.com/support/warranty/ for more information.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




UR60B-LPD2

Undercounter 60" Low Profile Refrigerator
with One Door and Two Drawers


STEELHEART

UR60B-LPD2
10/29/24
Item # 13717


FRONT VIEW

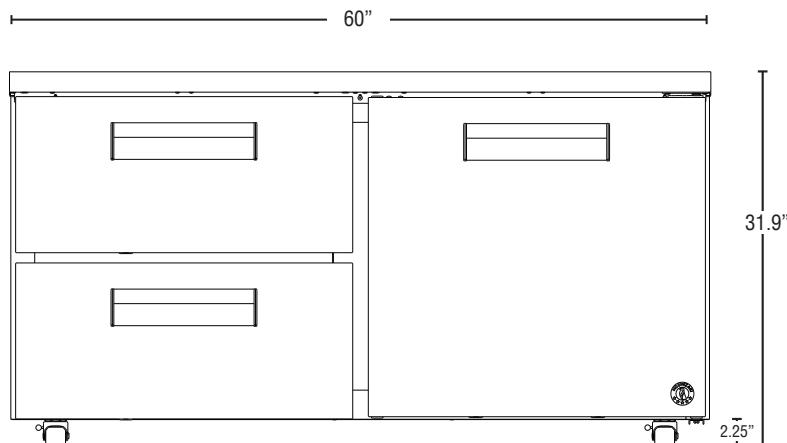

SIDE VIEW

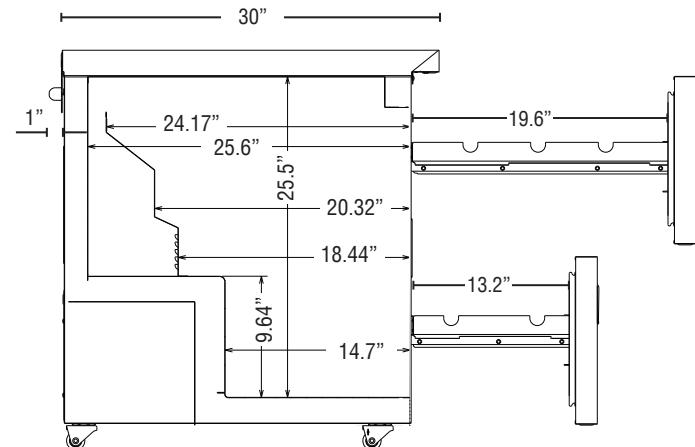

PLAN VIEW

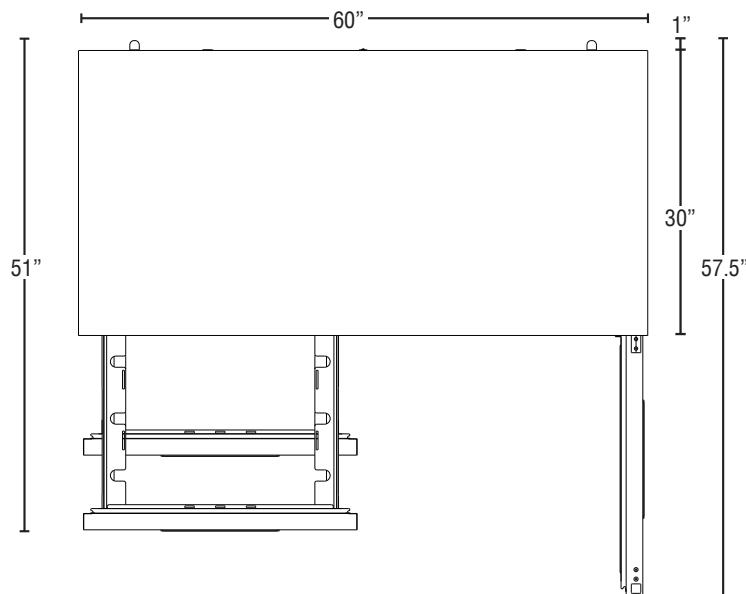

Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with an ABS top. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelves are adjustable in $\frac{1}{2}$ " increments. Cabinet walls are insulated with 2" CFC free, foamed in place polyurethane. 2.25" polyolefin, stem casters (two with brakes) are standard.

Drawer Construction

Drawer fronts are constructed of high grade stainless steel inside and out and drawers are insulated with 2" free foamed in place polyurethane. Drawer frames are formed of 14 gauge stainless steel and securely fastened in the cabinet. The drawer slides are 16 gauge stainless steel with acetal rollers to prevent metal to metal contact between the drawer slides and reduce wear. The drawer slides have a dynamic load capacity of 175 lbs. and have been life tested (fully loaded) three hundred thousand openings and closings without showing significant wear. The flush mount handles are constructed of extruded aluminum. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning. The bottom drawer will accommodate (1) full size pan and the top drawer will accommodate (1) 12x20 full size pan & (2) 1/4 size pans. The top and bottom drawers will accommodate 6" deep pans. Full size pans can be oriented in the top drawer front-to-back or left-to-right. If oriented front-to-back, drawer comes standard with drawer divider. If top drawer pans are oriented left-to-right, then HS-5433 is required for this configuration.

Door Construction

Doors are constructed of high grade stainless steel exterior with an ABS interior liner and are insulated with 2" CFC free, foamed in place polyurethane. Hoshizaki's exclusive "stepped" design protects the gasket while product is removed from the cabinet. Doors are provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing doors are equipped with a stay open feature past 90 degrees. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Field reversible door hinging is standard.

Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an "off cycle" defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).