

VR2A-FS

Two Section Full Solid Door Refrigerator

W x D x H

54.31" x 32.00" x 81.70"
(including 4" casters)



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

42.45 ft³

Overall Width x Depth

54.31" x 32.00"

Height (including 4" casters)

81.70"

Door Opening (W x H)

22.63" x 52.31"

Depth with Door Open at 90°

57.5"

Adjustable Shelves

6

Shelf Dimensions (W x D)

23.94" x 25.16"

Crated Shipping Weight

471 lbs

Crated Length x Depth x Height

58" x 33.5" x 83.88"

Electrical / Refrigeration

Voltage

115/60/1

HACR Breaker

15.0 Amps

Electrical Connection (NEMA)

5-15P

Voltage Range

103-127

Ambient Temp. Range

45° to 100°F

Control Setpoint Range

36° to 40°F

Amperage

3.5

Energy Consumption (kWh/day) @ASHRAE

1.48

Appox. Nominal Compre. BTU/HR (HP)

2322(1/2HP)

Refrigerant / Charge Amount (oz.)

R290 / (4.1oz)

Options

- Full Tray Pan Rack, 16 Pan Capacity (HS-5786)
- Half Tray Pan Rack, 8 Pan Capacity (HS-5787)
- Left 2-Section UR Shelf, 1 pack (HS-5790)
- Left 2-Section UR Shelf, 3 Pack (HS-5791)
- Right 2-Section UR Shelf, 1 pack (HS-5792)
- Right 2-Section UR Shelf, 3 pack (HS-5793)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

VALIANCE.

by HOSHIZAKI

Item #: _____

Project: _____

Qty: _____

AIA#: _____


FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) and self-closing doors
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Exterior - Stainless steel doors, DualGuard™ Coated steel sides
- Interior - Stainless steel floor, aluminum sides, rear and top
- SmartCheck™ time initiated and time or temperature terminated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22


If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle.

We reserve the right to change specifications without notice.

FRONT VIEW

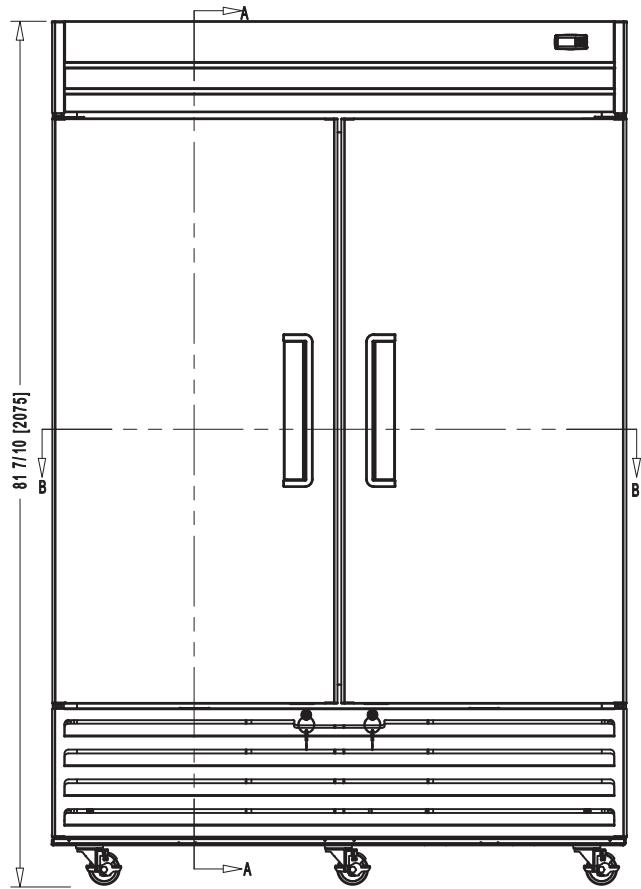

SIDE VIEW

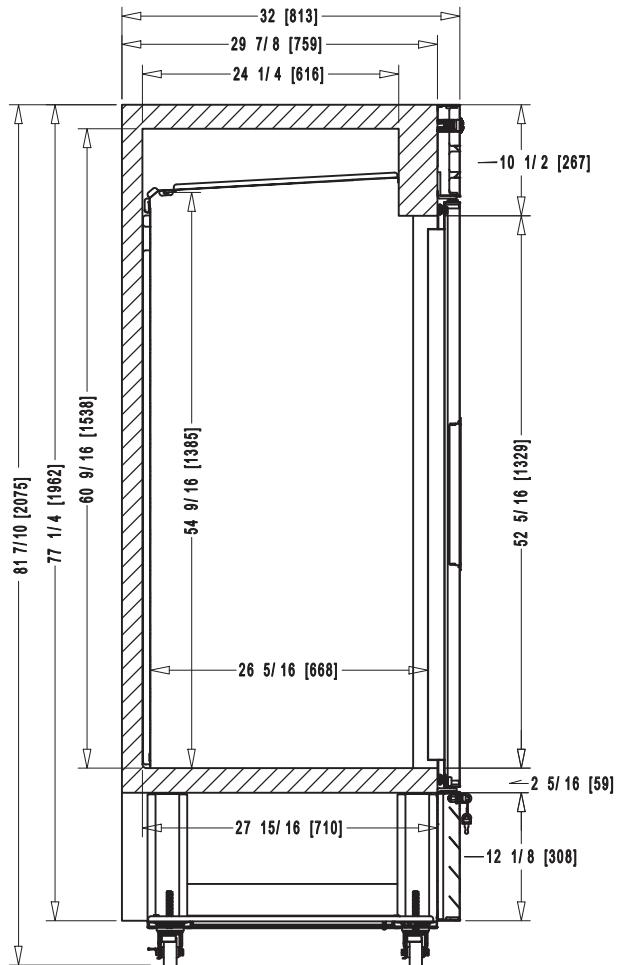

PLAN VIEW

