



# HOSHIZAKI

## Parts List

**Steelheart Series  
Refrigerated Kitchen Equipment**

**Models**

**RIA, FIA**

**R2A, F2A**

**R3A, F3A**

**Full Glass (FG), Full Solid (FS)**

**Half Glass (HG), Half Solid (HS)**



[hoshizakiamerica.com](http://hoshizakiamerica.com)

Number: 71422  
Issued: 1-15-2019  
Revised: 12-4-2025

## CONTENTS

Auxiliary Codes.....	3
Note About Ordering Parts .....	7
A. Main Assembly .....	8
_1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL .....	8
_2A-FG/FGN/FGEN/FS/FSN/FSC/HG/HS .....	11
_3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS.....	14
_3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS.....	15
B. Refrigeration Circuit.....	18
_1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL	
_2A-FG/FGN/FS/FSC/FSN/HG/HS	
_3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS.....	18
C. Door-Full Glass.....	22
Right Hinged .....	22
Left Hinged.....	23
D. Door-Full Solid .....	25
Right Hinged .....	25
Left Hinged.....	26
E. Door-Half Glass .....	28
Right Hinged .....	28
Left Hinged.....	29
F. Door-Half Solid .....	31
Right Hinged .....	31
Left Hinged.....	32
G. Accessories & Labels.....	34
_1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL,	
_2A-FG/FGN/FS/HG/HS, _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS.....	34

## Auxiliary Codes

### **R1A-FG**

H-5 December 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
K-5 January 2020  
K-6 October 2020  
L-5 January 2021  
M-5 February 2022  
N-5 March 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FGCL**

H-5 December 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
K-5 January 2020  
K-6 October 2020  
L-5 June 2021  
M-5 February 2022  
N-5 February 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FGCR**

J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
K-5 January 2020  
K-6 October 2020  
L-5 March 2021  
M-5 February 2022  
N-5 May 2023  
N-6 October 2023  
Q-5 January 2025

### **R1A-FS**

H-5 July 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
K-5 January 2020  
K-6 October 2020  
L-5 January 2021  
L-6 October 2021  
M-5 January 2022  
N-5 January 2023  
N-6 September 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FSCL**

M-5 June 2022  
N-5 January 2023  
N-6 October 2023  
P-5 April 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FSCR**

M-5 June 2022  
N-5 January 2023  
N-6 August 2023  
P-5 April 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FSJ**

J-5 March 2019  
J-6 May 2020  
J-7 July 2019  
L-5 January 2021  
M-5 March 2022  
N-5 May 2023  
N-6 August 2023  
P-5 August 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FSL**

H-5 December 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
K-5 February 2020  
K-6 October 2020  
L-5 January 2021  
L-6 October 2021  
M-5 February 2022  
N-5 February 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-FSLJ**

J-5 March 2019  
J-6 May 2019  
J-7 August 2019  
K-5 August 2020  
L-5 January 2021  
M-5 March 2022  
N-5 April 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R1A-HG**

J-5 January 2019  
J-6 June 2019  
J-7 September 2019  
J-8 October 2019  
K-5 July 2020  
K-6 October 2020  
L-5 April 2021  
M-5 June 2022  
N-5 January 2023  
N-6 November 2023  
P-5 February 2024  
Q-5 January 2025

## Auxiliary Codes (Continued)

### R1A-HS

H-5 July 2018  
 J-5 April 2019  
 J-6 June 2019  
 J-7 July 2019  
 K-5 February 2020  
 K-6 October 2020  
 L-5 January 2021  
 M-5 February 2022  
 N-5 January 2023  
 N-6 August 2023  
 P-5 January 2024  
 Q-5 January 2025

### R1A-HSL

H-5 December 2018  
 J-5 February 2019  
 J-6 June 2019  
 J-7 July 2019  
 K-5 February 2020  
 L-5 January 2021  
 M-5 February 2022  
 N-5 January 2023  
 N-6 November 2023  
 P-5 February 2024  
 P-6 October 2024

### F1A-FG

J-5 February 2019  
 K-5 January 2020  
 L-5 January 2021  
 M-5 April 2022  
 N-5 March 2023  
 N-6 November 2023  
 P-5 January 2024

### F1A-FS

H-5 July 2018  
 J-5 January 2019  
 J-6 June 2019  
 J-7 July 2019  
 K-5 January 2020

L-5 January 2021  
 L-6 November 2021  
 M-5 January 2022  
 N-5 January 2023  
 N-6 August 2023  
 P-5 January 2024  
 Q-5 January 2025

### F1A-FSL

H-5 December 2018  
 J-5 January 2019  
 J-6 June 2019  
 J-7 July 2019  
 K-5 January 2020  
 L-5 January 2021  
 M-5 January 2022  
 N-5 January 2023  
 N-6 August 2023  
 P-5 January 2024  
 Q-5 January 2025

### F1A-HG

J-5 January 2019  
 J-7 November 2019  
 K-5 October 2020  
 L-5 April 2021  
 M-5 September 2022  
 N-5 January 2023  
 N-6 October 2023  
 P-5 February 2024

### F1A-HS

H-5 November 2018  
 J-5 February 2019  
 J-6 July 2019  
 J-7 July 2019  
 K-5 February 2020  
 L-5 January 2021  
 M-5 March 2022  
 N-5 January 2023  
 N-6 August 2023  
 P-5 January 2024  
 Q-5 January 2025

### F1A-HSL

H-5 December 2018  
 J-5 March 2019  
 J-6 June 2019  
 J-7 July 2019  
 K-5 March 2020  
 L-5 January 2021  
 M-5 April 2022  
 N-5 April 2023  
 N-6 August 2023  
 P-5 January 2024  
 Q-5 February 2025

## **Auxiliary Codes (Continued)**

### **R2A-FG**

H-5 December 2018  
J-5 January 2019  
J-6 April 2019  
J-8 July 2019  
J-9 November 2019  
K-5 March 2020  
L-5 January 2021  
M-5 February 2022  
N-5 March 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R2A-FGN**

M-5 April 2022

### **R2A-FGEN**

P-5 July 2024

### **R2A-FS**

H-5 July 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
J-8 November 2019  
K-5 January 2020  
L-5 January 2021  
M-5 February 2022  
N-5 February 2023  
N-6 August 2023  
P-5 January 2024  
P-6 September 2024  
Q-5 January 2025

### **R2A-FSN**

M-5 April 2022  
N-5 July 2023  
P-5 February 2024  
P-6 September 2024  
Q-5 January 2025

### **R2A-FSC**

M-5 June 2022  
N-5 February 2023  
N-6 August 2023  
P-5 February 2024  
P-6 September 2024  
Q-5 January 2025

### **R2A-HG**

J-5 January 2019  
J-6 May 2019  
J-7 September 2019  
K-5 March 2020  
L-5 March 2021  
M-5 February 2022  
N-5 March 2023  
N-6 November 2023  
P-5 May 2024  
P-6 October 2024

### **R2A-HS**

H-5 July 2018  
J-5 February 2019  
J-6 June 2019  
K-5 March 2020  
L-5 February 2021  
M-5 March 2022  
N-5 January 2023  
N-6 August 2023  
P-5 January 2024

### **F2A-FG**

J-6 May 2019  
K-5 May 2020  
L-5 April 2021  
M-5 February 2022  
N-5 May 2023  
P-5 January 2024

### **F2A-FGN**

M-5 April 2022

### **F2A-FGEN**

P-5 July 2024

### **F2A-FS**

H-5 July 2018  
J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
J-8 November 2019  
K-5 January 2020  
K-6 May 2020  
K-7 December 2020  
L-5 January 2021  
M-5 February 2022  
N-5 January 2023  
N-6 August 2023  
P-5 July 2024  
Q-5 April 2025

### **F2A-FSN**

M-5 April 2022  
N-5 July 2023  
P-5 September 2024

### **F2A-HG**

J-5 January 2019  
J-6 May 2019  
M-5 June 2022  
N-5 May 2023

### **F2A-HS**

H-5 July 2018  
J-5 January 2019  
J-6 June 2019  
J-7 August 2019  
K-5 March 2020  
K-6 October 2020  
L-5 April 2021  
M-5 February 2022  
N-5 January 2023  
N-6 August 2023  
P-5 January 2024

## **Auxiliary Codes (Continued)**

### **R3A-FG**

J-5 March 2019  
J-6 June 2019  
J-7 July 2019  
J-8 November 2019  
K-5 February 2020  
K-6 November 2020  
L-5 February 2021  
M-5 February 2022  
N-5 March 2023  
N-7 November 2023  
P-5 February 2024  
P-6 October 2024

### **R3A-FGCL**

J-5 January 2019

### **R3A-FGCR**

J-5 March 2019

### **R3A-FS**

J-5 January 2019  
J-6 June 2019  
J-7 July 2019  
J-8 November 2019  
K-5 January 2020  
K-6 October 2020  
L-5 January 2021  
M-5 January 2022  
N-5 March 2023  
N-6 August 2023  
N-7 October 2023  
P-5 January 2024  
P-6 August 2024  
Q-5 January 2025

### **R3A-FSCL**

J-5 January 2019

### **R3A-FSCR**

J-5 March 2019  
M-5 January 2022

### **R3A-HG**

J-5 July 2019  
K-5 August 2020  
L-5 March 2021  
N-5 May 2023  
P-5 April 2024

### **R3A-HS**

H-5 December 2018  
J-5 January 2019  
J-6 June 2019  
L-5 May 2021  
M-5 April 2022  
N-6 September 2023

### **F3A-FS**

J-5 March 2019  
J-6 June 2019  
J-7 July 2019  
J-8 November 2019  
K-5 January 2020  
L-5 January 2021  
M-5 January 2022  
N-5 January 2023  
N-7 November 2023  
P-5 January 2024  
Q-5 January 2025

### **F3A-HS**

H-5 December 2018  
J-5 May 2019  
J-7 August 2019  
K-5 March 2020  
M-5 April 2022  
N-5 January 2023  
N-8 October 2023  
P-5 March 2024

## **Auxiliary Code Breakdown**

The auxiliary code is the first two characters in the serial number. The first character indicates the year. Years progress or regress in alphabetical order. The series runs from "A" through "V" and the letters "I" and "O" are skipped. The second character indicates significant part changes within a year. Base is "5" and this number advances for each change. In cases where there is a letter in parentheses, this designates the month. This is the last character in the serial number. The series runs from "(A)" through "(M)" and the letter "(I)" is skipped. This designation is only included when identifying a parts change within an auxiliary code.


## **Note About Ordering Parts**

Most assemblies cannot be ordered as complete units; parts in the assemblies generally must be ordered separately.



## A. Main Assembly

### 1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL

H-5 to Q-5

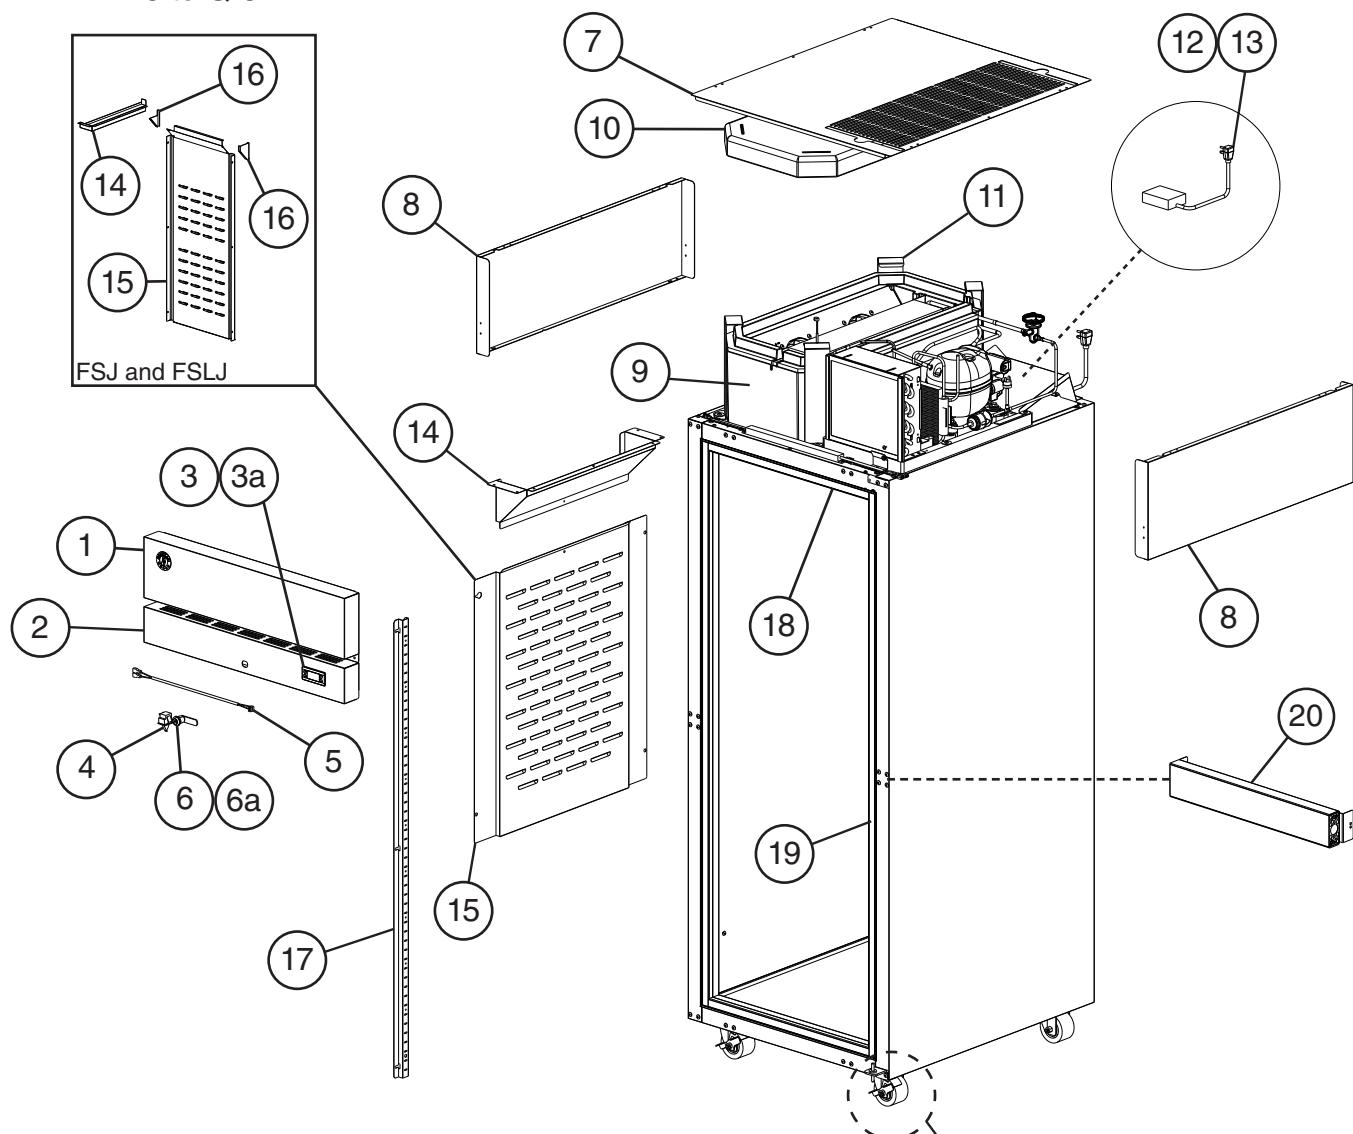

For Casters, see  
Section "G"

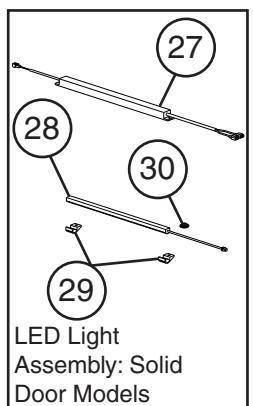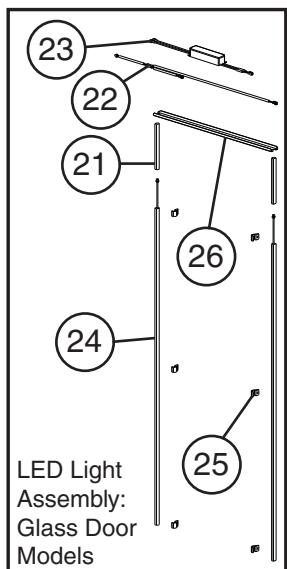

For Doors, see Section "C" through "F"


Title: A. Main Assembly Model: _1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL							
Index No.	Description	Material or Model Number	Part Number	Required Number			
				H-5 to Q-5			
1	Front Panel	<b>_1A-XXXX</b>	3A9604G01	1			
2	Control Panel	<b>_1A-XXXX Except -HG Models</b>	2A8615-01	1			
		<b>-HG</b>	2A8651-01	1			
3	Control Module	<b>R1A-FS/FSJ/ FSL/FSLJ/HS/ HSL</b>	4A6195G01	1			
		<b>R1A-FG/FGCL/ FGCR/HG</b>	4A6626G01	1			
		<b>F1A-FS/FSL/ HS/HSL</b>	4A6196G01	1			
		<b>F1A-FG/HG</b>	4A6627G01	1			
3a	Control Module Mounting Clip		4A5502-01	2			
4	Door Switch		3A1826-01	-			
			3B2145-01	1			
5	Door Switch Wire Harness		4A6203-01	1			
6	Lock (includes item 6a)		4A4924-01	1			
6a	Key (includes 2 keys)		4A5453-01	1			
7	Top Louver		2A9682-01	1			
8	Side Panel		2A8252-01	2			
9	Evaporator Case		1A6860-01	1	Aux. Code M-5 and Earlier order items 9 and 10 together.		
10	Evaporator Cover		1A6861-01	1			
11	Evaporator Case Latch		3A9802-01	4			
12	Power Supply Cord/ Wire Harness		3A9838-01	1			
13	Connector Cap	<b>R1A-XXXX</b>	4A6229-01	4			
14	Air Distribution Top	<b>_1A-XXXX Except -FSJ, -FSLJ</b>	1A3951-01	1			
		<b>-FSJ, -FSLJ</b>	2A9236-01	1			
15	Air Distribution Panel	<b>_1A-XXXX Except -FSJ, -FSLJ</b>	1A4930-01	1			
		<b>-FSJ, -FSLJ</b>	1A5710-01	1			
16	Air Distribution Cap	<b>-FSJ, -FSLJ (Right)</b>	2A9237-01	1			
		<b>-FSJ, -FSLJ (Left)</b>	2A9238-01	1			
17	Pilaster		3A0145-01	4			
18	Horizontal Thermal Breaker Cover	561 mm	2A8795-01	2			
19	Vertical Thermal Breaker Cover	1552 mm	2A8796-01	2			

Title: A. Main Assembly Model: _1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
20	Horizontal Mullion	R1A-HS/HG/HSL	2A8664A01	1		
		F1A-HS/HG/HSL	2A8824A01	1		
21	LED Lens (wire sleeve)	-FG, -FGCL, -FGCR, -HG	3A9861-01	2		
22	LED Y Harness		4A6080-01	1		
23	LED Driver		3A9820-01	1		
24	LED Lamp		3A9868-01	2		
25	LED Clip		4A5906-01	6		
26	LED Bracket		2A8826-01	1		
27	LED Driver	-FS, -FSCL, -FSJ, -FSL, -FSLJ, -HS, -HSL	3A9867-01	1		
28	LED Lamp		3A9788-01	1		
29	LED Clip		4A5906-01	2		
30	LED Bushing		425307-02	1		

## A. Main Assembly

**2A-FG/FGN/FGEN/FS/FSN/FSC/HG/HS**

H-5 to Q-5

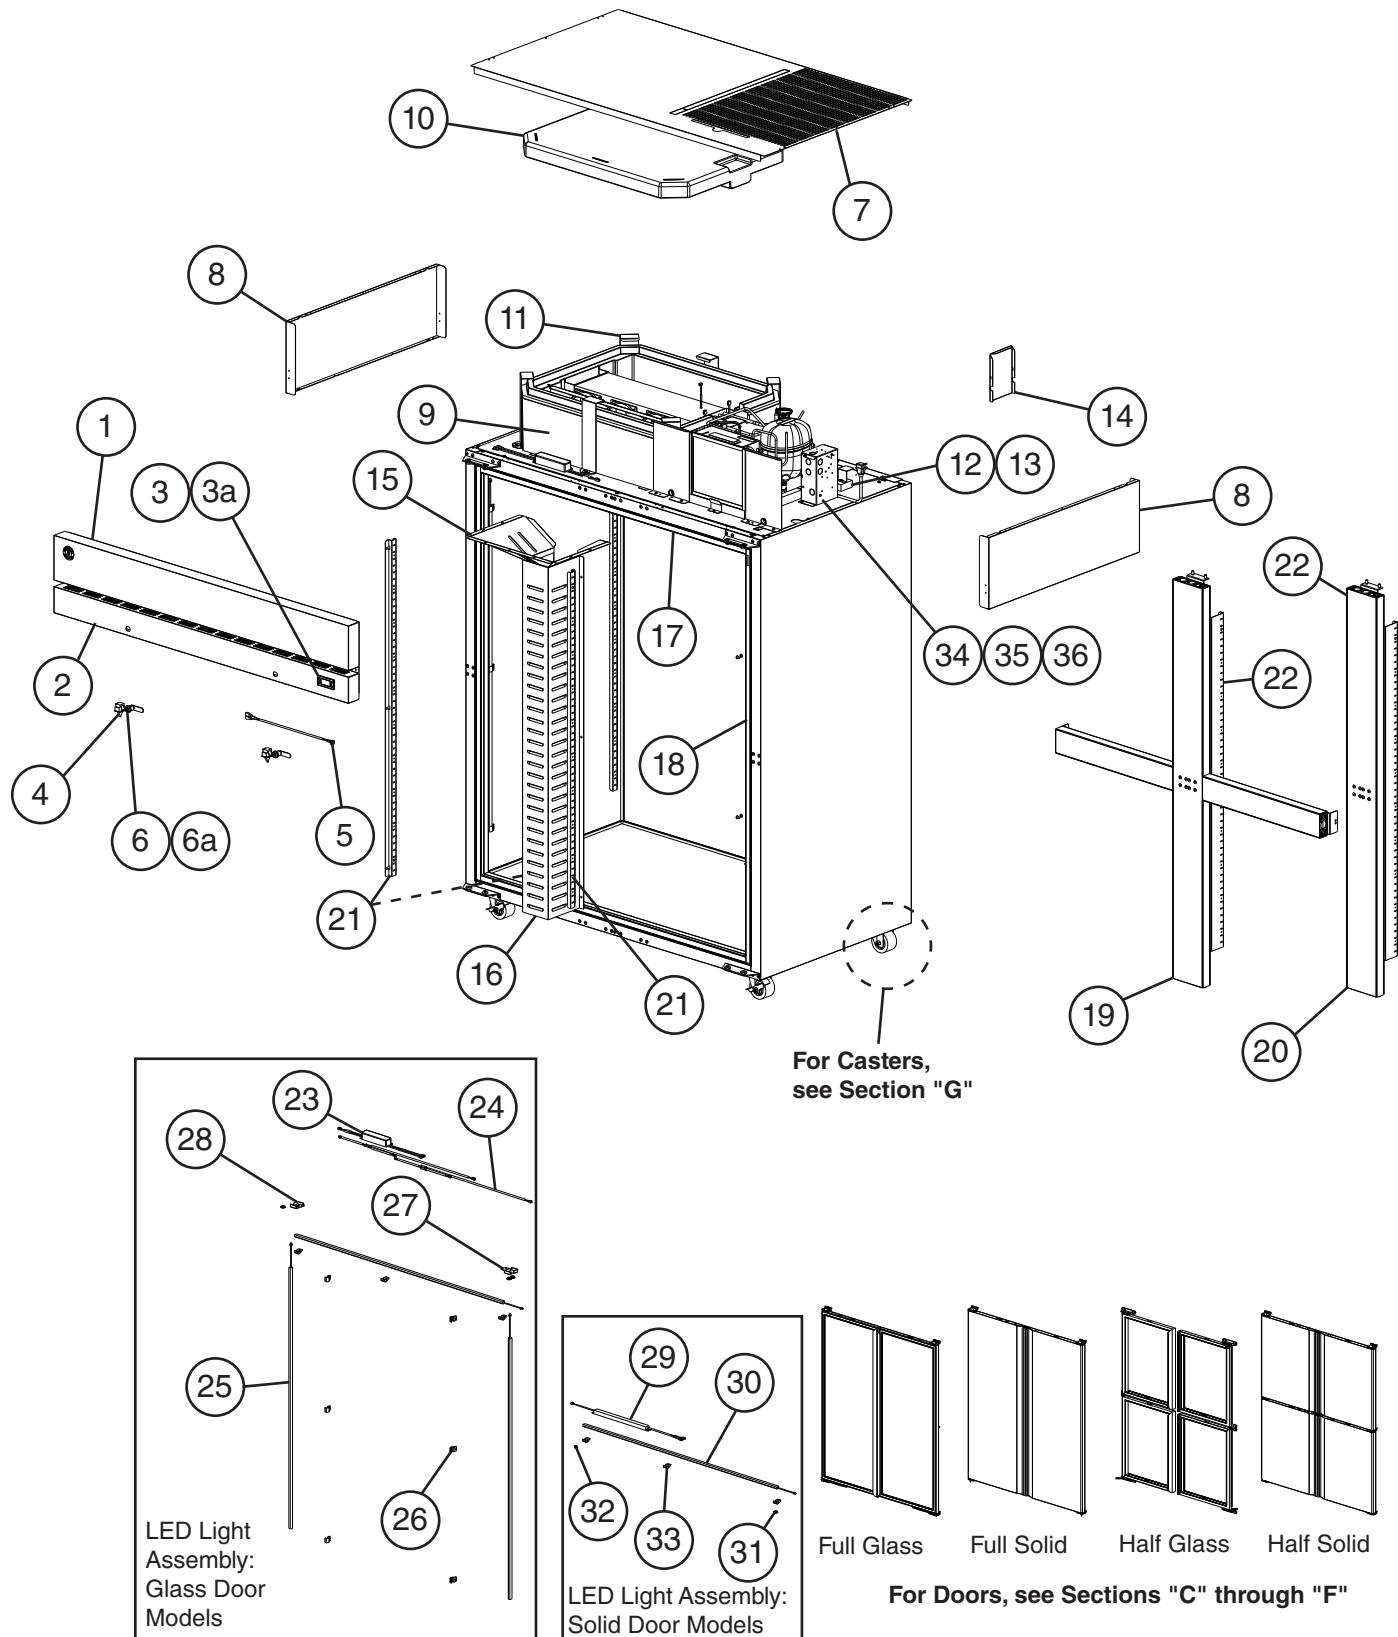

Title: A. Main Assembly Model: _2A-FG/FGN/FGEN/FS/FSN/FSC/HG/HS							
Index No.	Description	Material or Model Number	Part Number	Required Number			
				H-5 to Q-5			
1	Front Panel	_2A-XXXX	3A9740G01	1			
		_2A-FGN/FGEN/FSN	3B1235G01	1			
2	Control Panel	_2A-FG/FS/FSC/HS	2A8583-01	1			
		_2A-FGN/FGEN/FSN	2B0210-01	1			
		_2A-HG	2A8726-01	1			
3	Control Module	R2A-FS/FSC/FSN/HS	4A6195G01	1			
		R2A-FG/FGN/FGEN/HG	4A6626G01	1			
		F2A-FS/FSN/HS	4A6196G01	1			
		F2A-FG/FGN/FGEN/HG	4A6627G01	1			
3a	Control Module Mounting Clip		4A5502-01	2			
4	Door Switch		3B2145-01	2			
5	Door Switch Wire Harness		4A6203-01	1			
6	Lock (includes item 6a)		4A4924-01	2			
6a	Key (includes 2 keys)		4A5453-01	2			
7	Top Louver	F2A-HG/HS R2A-FG/FS/HS	2A9683-01	1			
		_2A-FGN/FGEN/FSN	2B0211-01	1			
8	Side Panel		2A8252-01	2			
9	Evaporator Case		1A6862-01	1	Aux. Code M-5 and Earlier order items 9 and 10 together.		
10	Evaporator Cover		1A6863-01	1			
11	Evaporator Case Latch		3A9802-01	6			
12	Power Supply Cord/Wire Harness		3A9838-01	1			
13	Connector Cap (filler connector)	R2A-XXXX	4A6229-01	4			
14	Control Box Cover	F2A-XXXX	3B0037-01	1			
15	Air Distribution Top		1A3950-03	1			
16	Air Distribution Channel		1A5035-01	1			
17	Horizontal Thermal Breaker Cover	1260 mm _2AFG/FS/FSC/HG/HS	2A8795-02	2			
		1181 mm _2A-FGN/FGEN/FSN	2A8795-04	2			
18	Vertical Thermal Breaker Cover	1552 mm	2A8796-01	2			
19	Cross Mullion (Includes 2 Mullion Pilasters)	R2A-HS/HG	2A8746A01	1			
		F2A-HS/HG	2A8836A01	1			
20	Vertical Mullion (Includes 2 Mullion Pilasters)	R2A-XXXX	2A8734A01	1			
		F2A-XXXX	2A8835A01	1			
21	Pilaster		3A0145-01	6			
22	Mullion Pilaster		2A9426-01	2			


Title: A. Main Assembly Model: _2A-FG/FGN/FGEN/FS/FSN/FSC/HG/HS						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
23	LED Driver	<b>_2A-FG/FGN/FGEN/HG</b>	3A9820-01	1		
24	LED Y Harness		4A6080-01	2		
25	LED Lamp		3A9868-01	3		
26	LED Clip		4A5906-01	9		
27	LED Bracket (Right)	<b>_2A-FG/HG/FGE</b>	3B0243-01	1		
			3B1242-01	1		
28	LED Bracket (Left)	<b>_2A-FG/HG/FGE</b>	3B0243-02	1		
			3B1242-02	1		
29	LED Driver	<b>_2A-FS/HS</b>	3A9867-01	1		
30	LED Lamp		3A9868-01	1		
31	Bushing		425307-02	1		
32	Hole Plug		4A0586-10	1		
33	LED Clip		4A5906-01	3		
<b>Control Box</b>						
34	Start Relay	<b>F2A-XXXX</b>	4A6386-01	1		
35	Start Capacitor	<b>F2A-XXXX</b>	4A6381-01	1		
36	Run Capacitor	<b>F2A-XXXX</b>	4A6382-01	1		

## A. Main Assembly

3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS

1/2

H-5 to Q-5


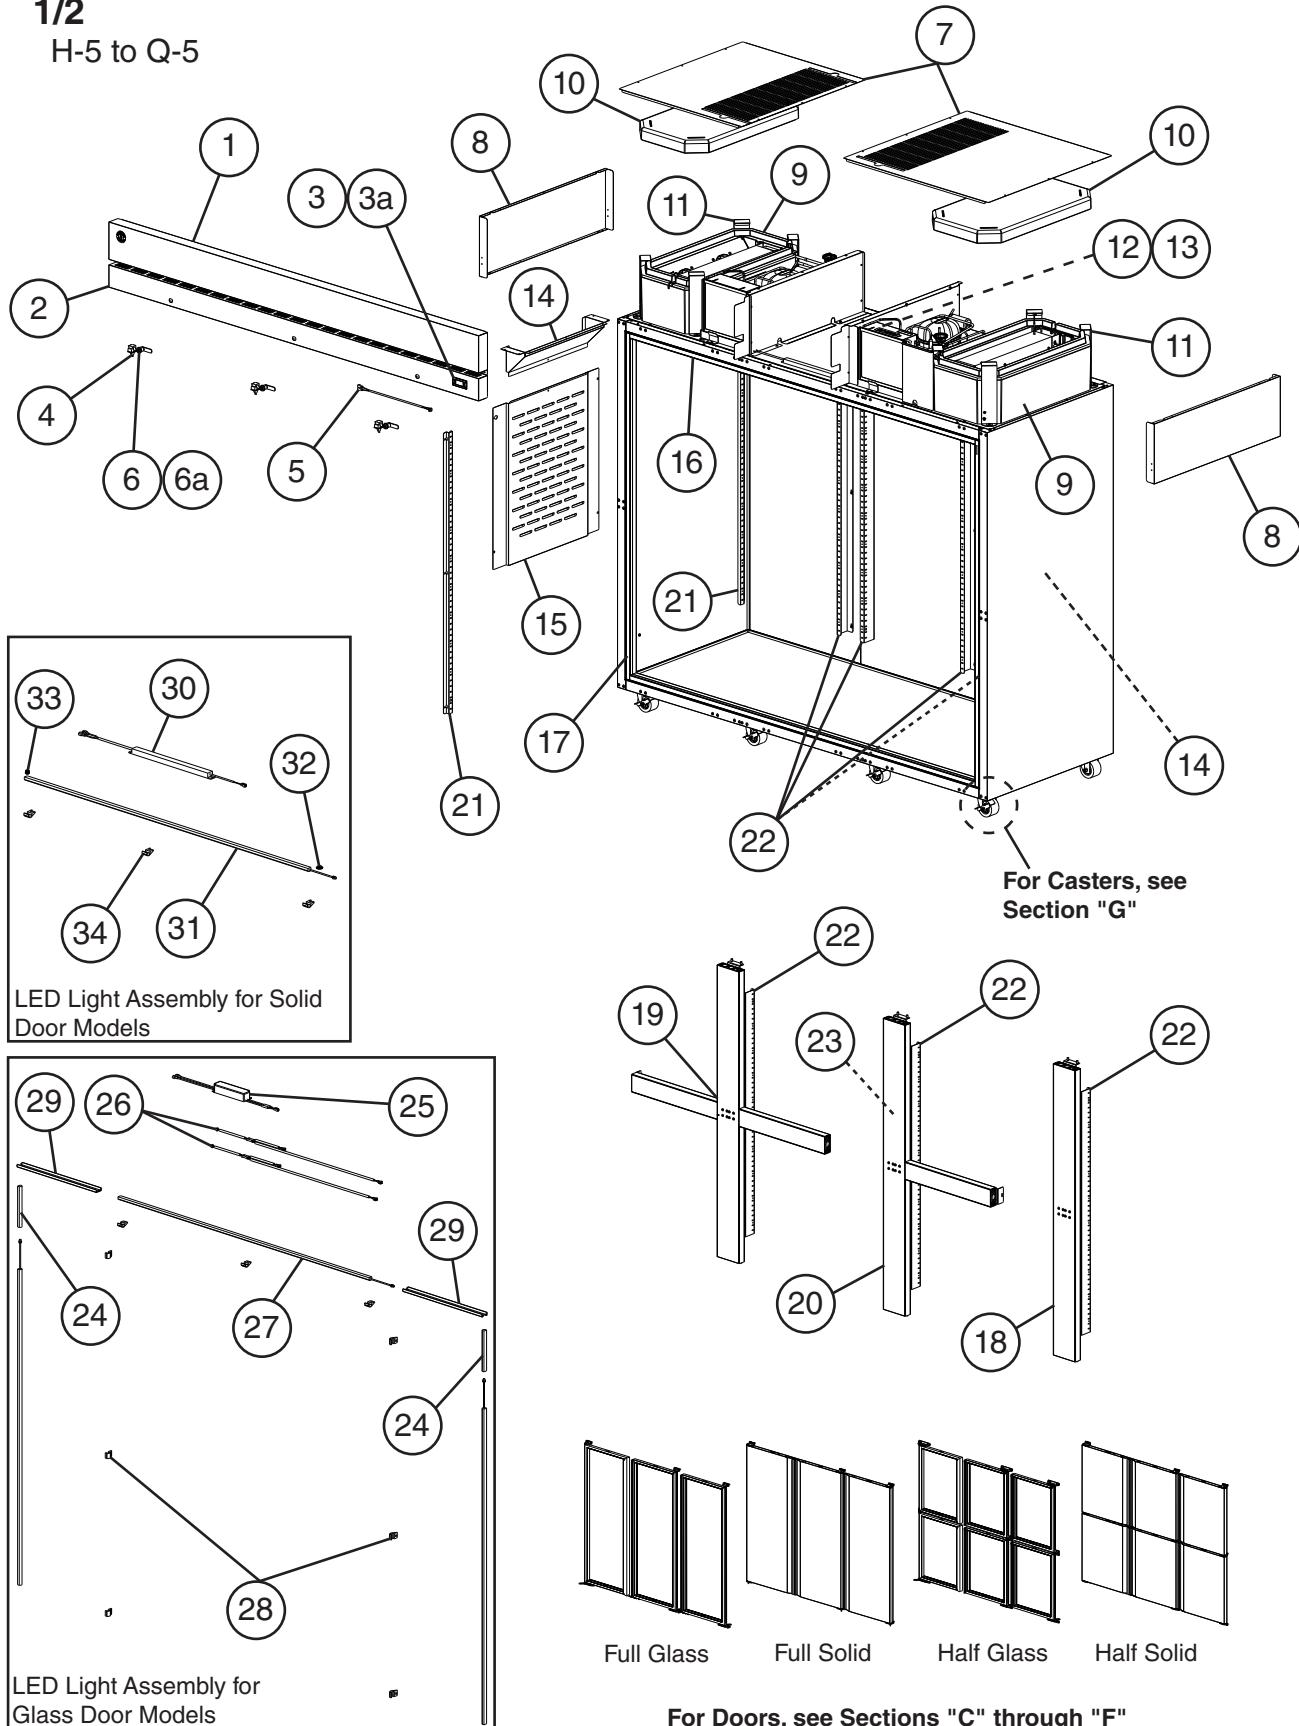


## A. Main Assembly

3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS

**2/2**

H-5 to Q-5

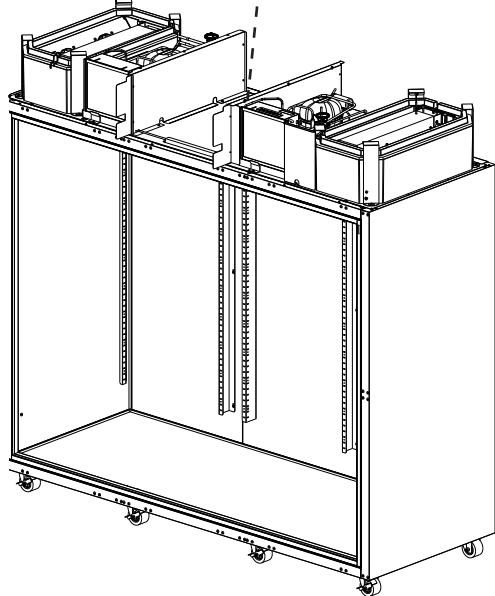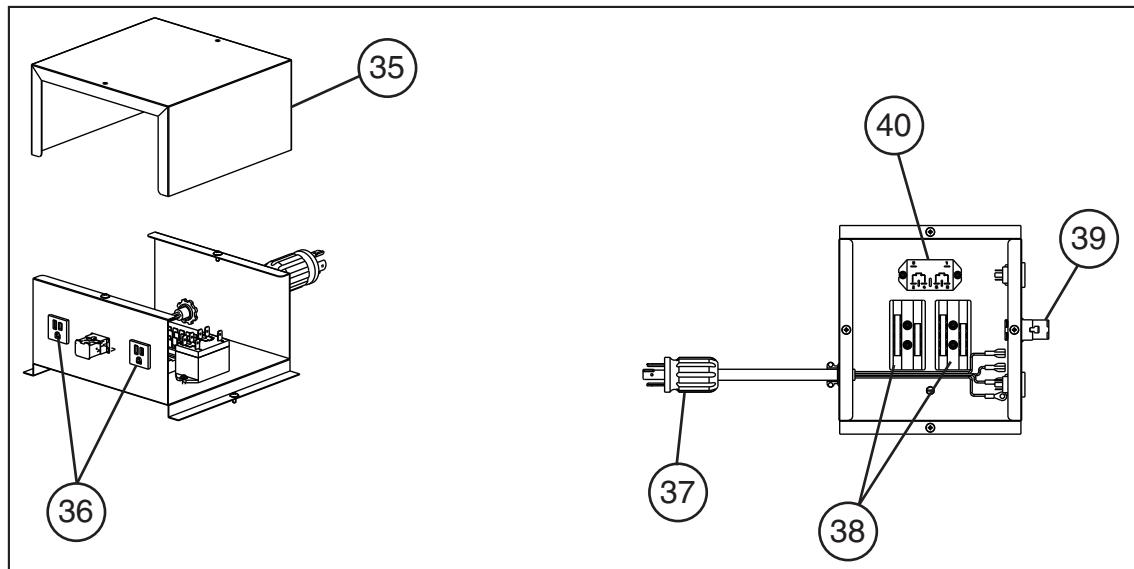


Title: A. Main Assembly Model: _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
1	Front Panel		3A9914G01	1		
2	Control Panel	<b>R3A-XXXX Except R3A-HG</b>	1A5164-01	1		
		<b>R3A-HG</b>	1A5259-01	1		
3	Control Module	<b>R3A-FS/FSCL/FSCR/HS</b>	4A6195G01	1		
		<b>R3A-FG/FGCL/FGCR/HG</b>	4A6626G01	1		
		<b>F3A-HS/FS</b>	4A6196G01	1		
3a	Control Module Mounting Clip		4A5502-01	2		
4	Door Switch		3A1826-01	-		
			3B2145-01	3		
5	Door Switch Harness		4A6203-01	1		
6	Lock (includes item 6a)		4A4924-01	3		
6a	Key (includes 2 keys)		4A5453-01	3		
7	Top Louver	<b>Left</b>	2A9682-01	1		
		<b>Right</b>	2A9685-01	1		
		<b>Center</b>	2A9684-01	1		
8	Side Panel		2A8252-01	2		
9	Evaporator Case		1A6860-01	2	Aux. Code M-5 and Earlier order items 9 and 10 together.	
10	Evaporator Cover		1A6861-01	2		
11	Evaporator Case Latch		3A9802-01	8		
12	Power Supply Cord	<b>R3A-XXXX</b>	4A0520-01	1		
		<b>F3A-XXXX</b>	4A6500-01	1		
13	Control Box Cover		2A9098-01	1		
14	Air Distribution Top		1A3951-01	2		
15	Air Distribution Panel		1A4930-01	2		
16	Horizontal Thermal Breaker Cover	1958 mm	2A8795-03	2		
17	Vertical Thermal Breaker Cover	1552 mm	2A8796-01	2		
18	Vertical Mullion (Includes 2 Pilaster)	<b>R3A-XXXX Except -HG/HS Models</b>	2A8734A01	2		
		<b>F3A-FS</b>	2A8835A01	2		
19	Cross Mullion (Includes 2 Pilaster)	<b>R3A-HG/HS</b>	2A8892A01	1		
		<b>F3A-HS</b>	2A8893A01	1		
20	Tee Mullion (Includes 2 Pilaster)	<b>R3A-HG/HS</b>	2A8747A01	1		
		<b>F3A-HS</b>	2A8837A01	1		
21	Pilaster	<b>_3A-XXXX</b>	3A0145-01	4		
22	Mullion Pilaster	<b>_3A-XXXX Except -HG/HS Models</b>	2A9426-01	8		
		<b>-HG/HS</b>		7		

Title: A. Main Assembly Model: _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS							
Index No.	Description	Material or Model Number	Part Number	Required Number			
				H-5 to Q-5			
23	Tee Mullion Pilaster	<b>-HG/HS</b>	2A9427-01	1			
24	LED Lens	<b>3A-FG/FGCL/FGCR/HG</b>	3A9861-01	2			
25	LED Driver		3A9820-01	1			
26	LED Y Harness		4A6080-01	2			
27	LED Lamp		3A9868-01	3			
28	LED Clip		4A5906-01	9			
29	LED Bracket		2A8894-01	2			
30	LED Driver		3A9867-01	1			
31	LED Lamp	<b>3A-FS/FSCL/FSCR/HS</b>	3A9868-01	1			
32	Bushing		425307-02	1			
33	Hole Plug		4A0586-10	1			
34	LED Clip		4A5906-01	3			
35	Control Box Cover		2A9098-01	1			
36	Receptacle		4A6494-01	2			
37	Power Cord		<b>Refrigerator</b>	4A0520-01	1		
			<b>Freezer</b>	4A6500-01	1		
38	Terminal Block	<b>Freezer</b>	4A2619-01	2			
39	Wire Harness	<b>Refrigerator</b>	3B0217-01	1			
			<b>Freezer</b>	3B0218-01	1		
40	Compressor Relay	<b>Freezer</b>	4A3140-02	1			

## B. Refrigeration Circuit

- 1A-FG/FGCL/FGCR/FS/FSCL/FSCR/FSJ/FSL/FSLJ/HG/HS/HSL**
- 2A-FG/FGN/FS/FSC/FSN/HG/HS**
- 3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS**

H-5 to Q-5

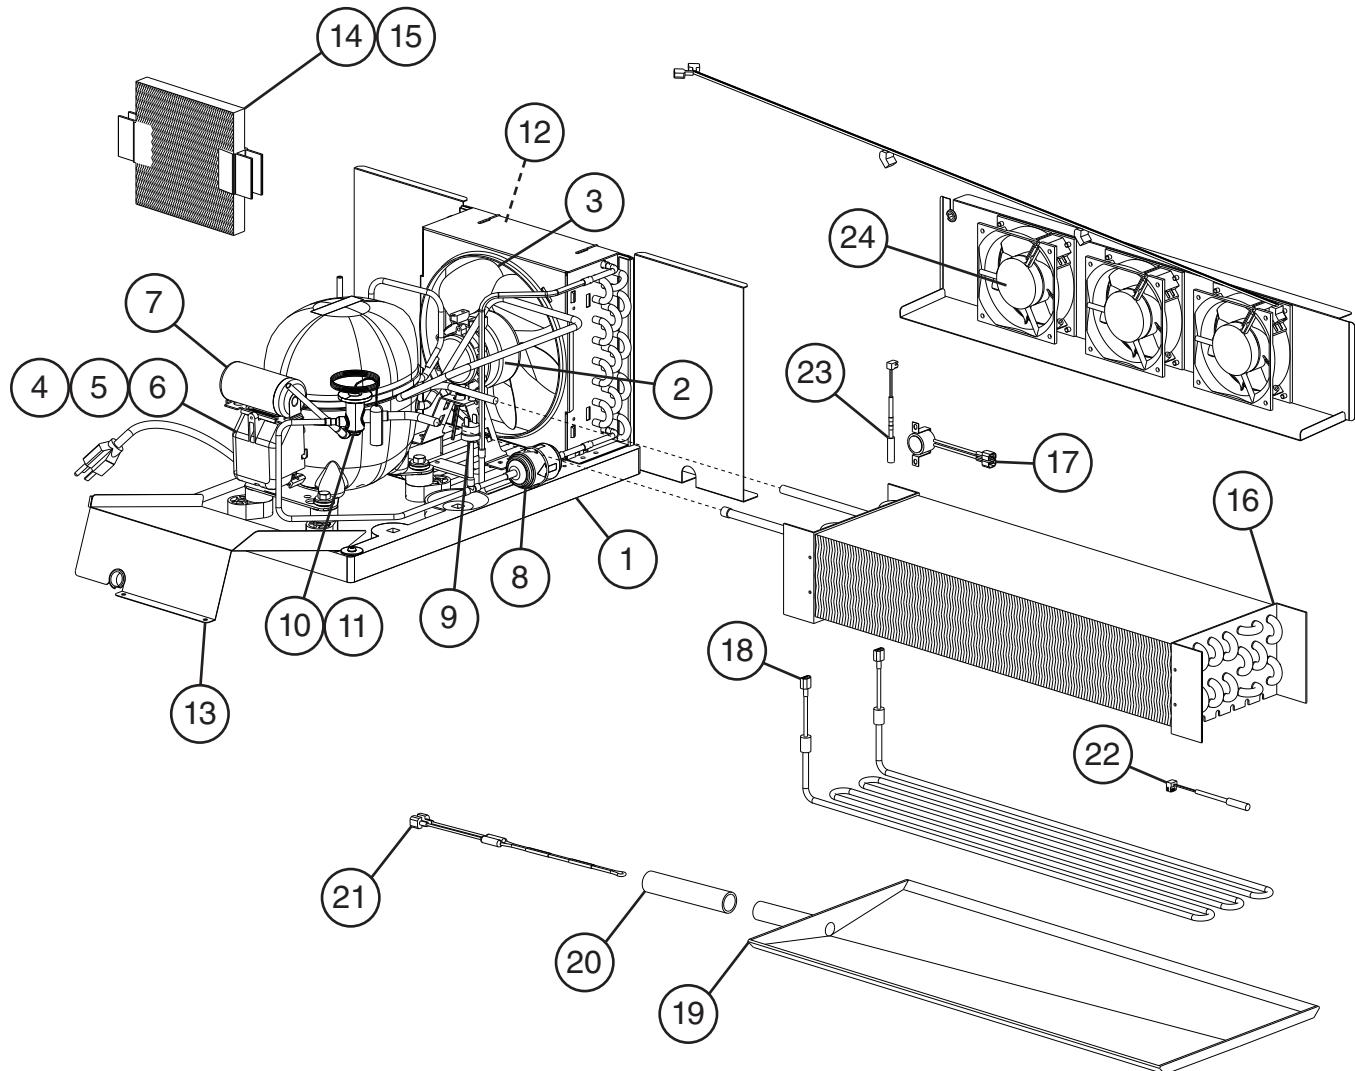




Title: B. Refrigeration Circuit Model: 1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL,  
2A-FG/FGN/FS/HG/HS,  
3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS

Index No.	Description	Material or Model Number	Part Number	Required Number							
				H-5 to L-5	M-5 to Q-5						
1	Condensing Unit (includes compressor, condenser, and items 2 through 8, compressor and condenser are not sold individually)	<b>R1A-XXXX</b>	2A8791-01	1	1						
		<b>R3A-XXXX</b>		2	2						
		<b>F1A-XXXX</b>	2A8792-01	1	1						
		<b>F3A-XXXX</b>		2	2						
		<b>R2A-XXXX</b>	2A8793-01	1	1						
2	Condenser Fan Motor	<b>F2A-XXXX</b>	2A8794-01	1	1						
		<b>_1A-XXXX</b>	4A6376-01	1	1						
		<b>_2A-XXXX</b>		2	2						
3	Condenser Fan Blade	<b>_3A-XXXX</b>	4A6377-01	1	1						
		<b>_1A-XXXX</b>		2	2						
		<b>_2A-XXXX</b>									
4	Compressor External Protector	<b>R1A-XXXX</b>	4A6927-01	1	1						
		<b>R3A-XXXX</b>		2	2						
		<b>R2A-XXXX</b>	4A6928-01	1	1						
		<b>F1A-XXXX</b>	4A6389-01	1	1						
		<b>F3A-XXXX</b>		2	2						
5	Start Relay	<b>R1A-XXXX</b>	4A6383-01	1	1						
		<b>R3A-XXXX</b>		2	2						
		<b>R2A-XXXX</b>	4A6384-01	1	1						
		<b>F1A-XXXX</b>	4A6385-01	1	1						
		<b>F3A-XXXX</b>		2	2						
6	Condensing Unit Power Supply Cord	<b>R1A-XXXX</b>	4A6501-01	1	1						
		<b>R2A-XXXX</b>		2	2						
		<b>R3A-XXXX</b>	4A6502-01	1	1						
		<b>F1A-XXXX</b>		2	2						
		<b>F3A-XXXX</b>	4A6503-01	1	1						
7	Start Capacitor	<b>F2A-XXXX</b>									
		<b>R1A-XXXX</b>	4A6378-01	1	1						
		<b>R3A-XXXX</b>		2	2						
		<b>R2A-XXXX</b>	4A6379-01	1	1						
		<b>F1A-XXXX</b>	4A6380-01	1	1						
8	Drier	<b>F3A-XXXX</b>		2	2						
		<b>_1A-XXXX</b>	4A1113-01	1	1						
		<b>_2A-XXXX</b>		2	2						
9	High-Pressure Switch	<b>_3A-XXXX</b>									
		<b>R1A-XXXX</b>	4A6039-01	1	1						
		<b>R2A-XXXX</b>		2	2						
		<b>R3A-XXXX</b>	4A7399-01	1	1						
		<b>F1A-XXXX</b>		2	2						
		<b>F2A-XXXX</b>									
		<b>F3A-XXXX</b>									






Title: B. Refrigeration Circuit Model: _1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL, _2A-FG/FGN/FS/HG/HS, _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS								
Index No.	Description	Material or Model Number	Part Number	Required Number				
				H-5 to L-5	M-5 to Q-5			
10	Thermostatic Expansion Valve (R_A-XXXX, F1A-XXXX, and F3A-XXXX includes item 11)	R1A-XXXX	4A6869A01	1	1			
		R2A-XXXX	4A7211A01	1	1			
		R3A-XXXX	4A6869A01	2	2			
		F1A-XXXX	4A7212A01	1	1			
		F2A-XXXX	4A7213A01	1	1			
		F3A-XXXX	4A7212A01	2	2			
11	Thermostatic Expansion Valve Cover	R1A-XXXX	4A6201-01	1	1			
		R2A-XXXX	4A7233-01	1	1			
		R3A-XXXX	4A6201-01	2	2			
		F1A-XXXX	4A7233-01	1	1			
		F2A-XXXX	4A7233-01	1	1			
		F3A-XXXX	4A7233-01	2	2			
12	Air Filter	_1A-XXXX, _2A-XXXX	4A6189-01	1	1			
		_3A-XXXX		2	2			
		_1A-XXXX, _3A-XXXX	2A9004-01	1	1			
14	Wick	R1A-XXXX, R2A-XXXX	4A6188-01	1	1			
		R3A-XXXX		2	2			
15	Wick Retainer	R1A-XXXX, R2A-XXXX	4A6164-01	2	2			
		R3A-XXXX		4	4			
16	Evaporator	_1A-XXXX	2A8783-01	1	-			
			2A9932-01		1			
		R2A-XXXX	2A8631-01	1	-			
			2B0024-01		1			
		_3A-XXXX	2A8783-01	2	-			
			2A9932-01		2			
		F2A-XXXX	2B0018-01	1	1			
17	Defrost Thermostat	F1A-XXXX, F2A-XXXX	4A6194-01	1	1			
		F3A-XXXX		2	2			
18	Defrost Heater	F1A-XXXX	3A9800-01	1	1			
		F3A-XXXX		2	2			
		F2A-XXXX	3A9801-01	1	1			
19	Evaporator Drain Pan	_1A-XXXX	1A4805-01	1	1			
		_3A-XXXX		2	2			
		_2A-XXXX	1A4827-01	1	1			
20	Drain Hose	_1A-XXXX	7716B2025	1	1			
		_2A-XXXX		1	1			
		_3A-XXXX		2	2			
21	Drain Tube Heater	F1A-XXXX, F2A-XXXX	4A6197-01	1	1			
		F3A-XXXX		2	2			

Title: B. Refrigeration Circuit Model: <u>1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL</u> , <u>2A-FG/FGN/FS/HG/HS</u> , <u>3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS</u>								
Index No.	Description	Material or Model Number	Part Number	Required Number				
				H-5 to L-5	M-5 to Q-5			
22	Cabinet Thermistor	<u>1A-XXXX</u> , <u>2A-XXXX</u> , <u>3A-XXXX</u>	4A4864-02	1	1			
23	Defrost Thermistor	<u>1A-XXXX</u> , <u>2A-XXXX</u>	4A4865-02	1	1			
		<u>3A-XXXX</u>	4A4865-03	1	1			
24	Evaporator Fan Motor	<u>1A-XXXX</u>	4A6192-01	2	2			
		<u>2A-XXXX</u>		3	3			
		<u>3A-XXXX</u>		4	4			

**C. Door-Full Glass**  
**Right Hinged**  
**1/2**  
H-5 to Q-5

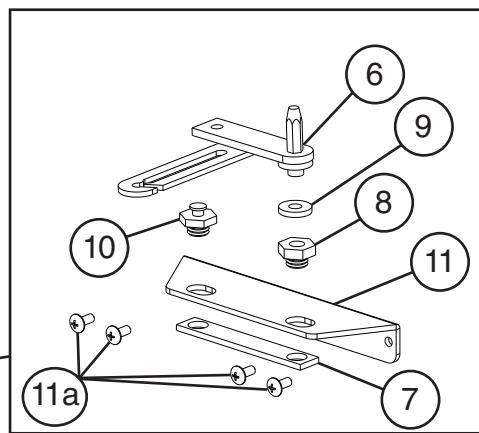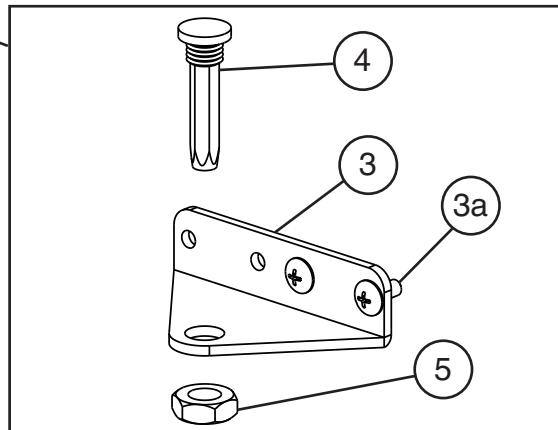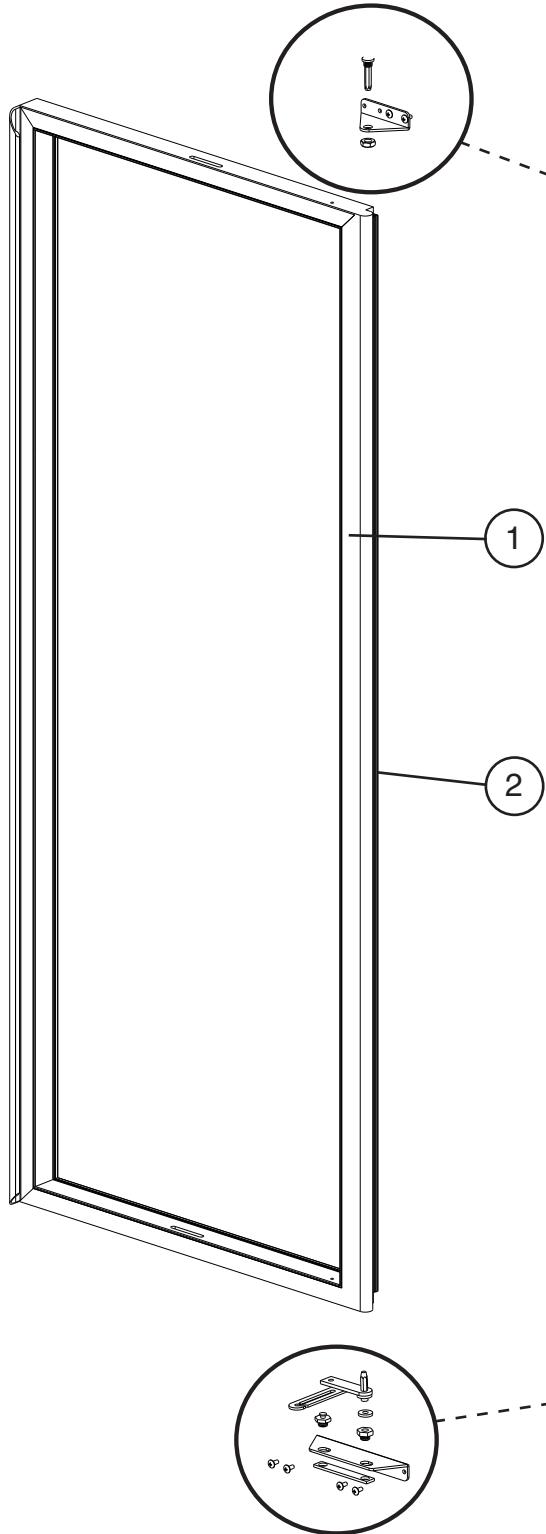


**C. Door-Full Glass**  
**Left Hinged**  
**2/2**  
H-5 to Q-5

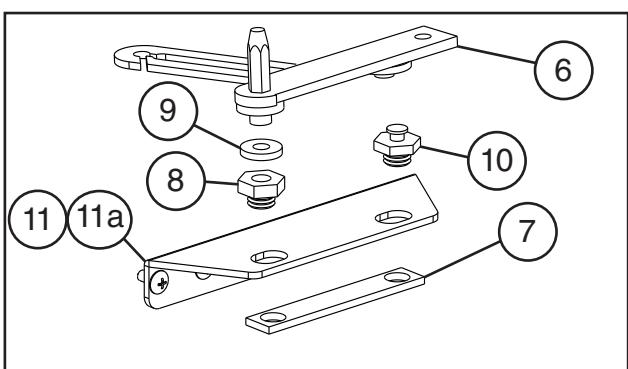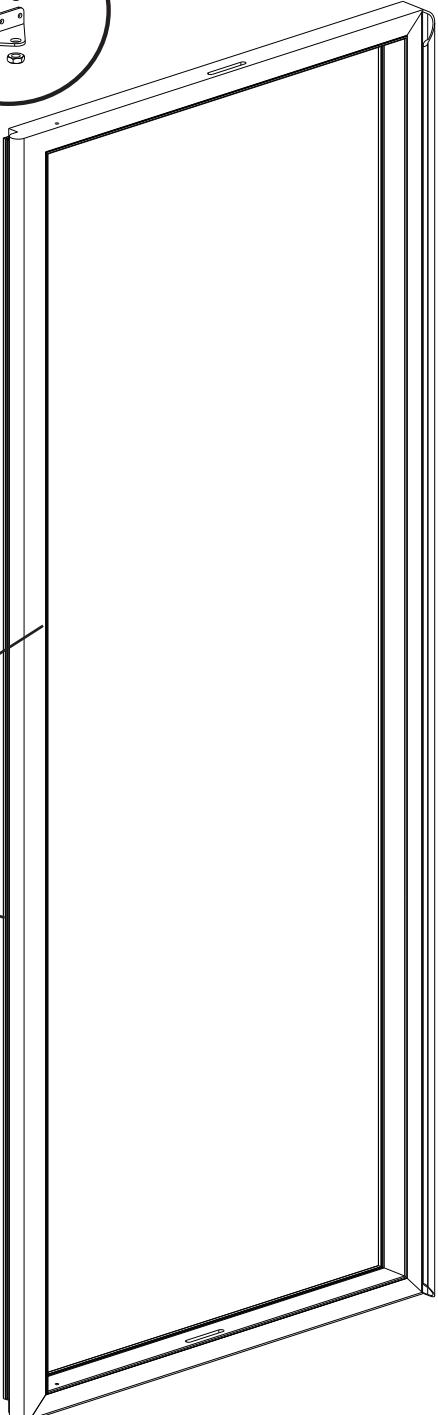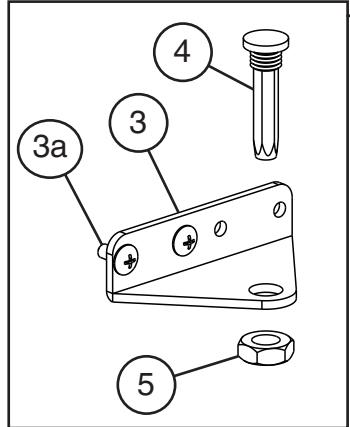

Title: C. Door-Full Glass Model: Full Glass						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
1	Right Glass Door	<b>R_A-FG/FGCR</b>	2A7834-03	1		
		<b>F_A-FG</b>	2A7834-04	1		
		<b>R2A-FGN</b>	2B0202-03	1		
		<b>F2A-FGN</b>	2B0202-04	1		
	Left Glass Door	<b>R_A-FG/FGCL</b>	2A7834-01	1		
		<b>F_A-FG</b>	2A7834-02	1		
		<b>R2A-FGN</b>	2B0202-01	1		
		<b>F2A-FGN</b>	2B0202-02	1		
2	Gasket		3A8864-01	1		
3	Upper Hinge Bracket		3A9162-01	1		
3a	Truss Head Screw	5x12, SS	7C32-0512	2		
4	Tension Rod (hinge pin)		3A7946-04	1		
5	Lock Nut		3A7946-05	1		
6	Lower Hinge Arm		3A7946-01	1		
7	Backer Plate		3A7946-08	1		
8	Bottom Hinge Bushing		3A7946-09	1		
9	Nylon Washer		3A7946-10	1		
10	Slide Pin		3A7946-11	1		
11	Lower Hinge Bracket		3A9161-01	1		
11a	Truss Head Screw	5x12, SS	7C32-0512	4		

**D. Door-Full Solid  
Right Hinged  
1/2  
H-5 to Q-5**


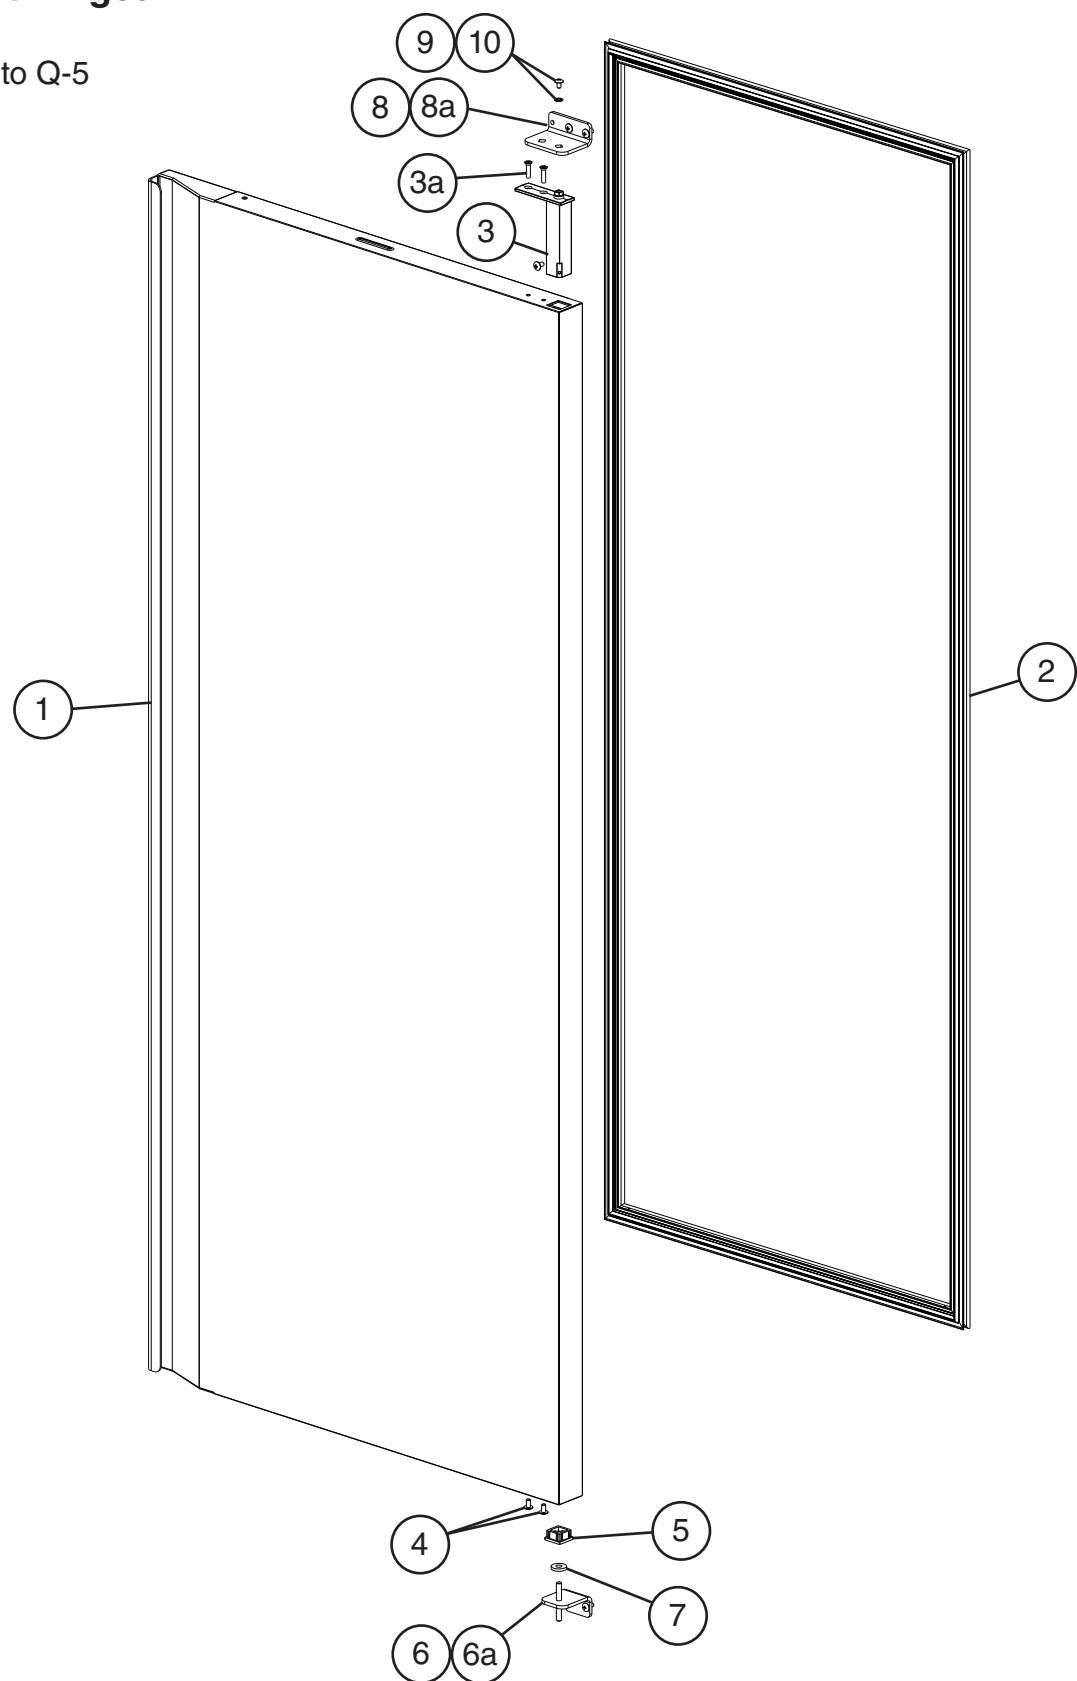


## D. Door-Full Solid



Left Hinged

2/2

H-5 to Q-5



1

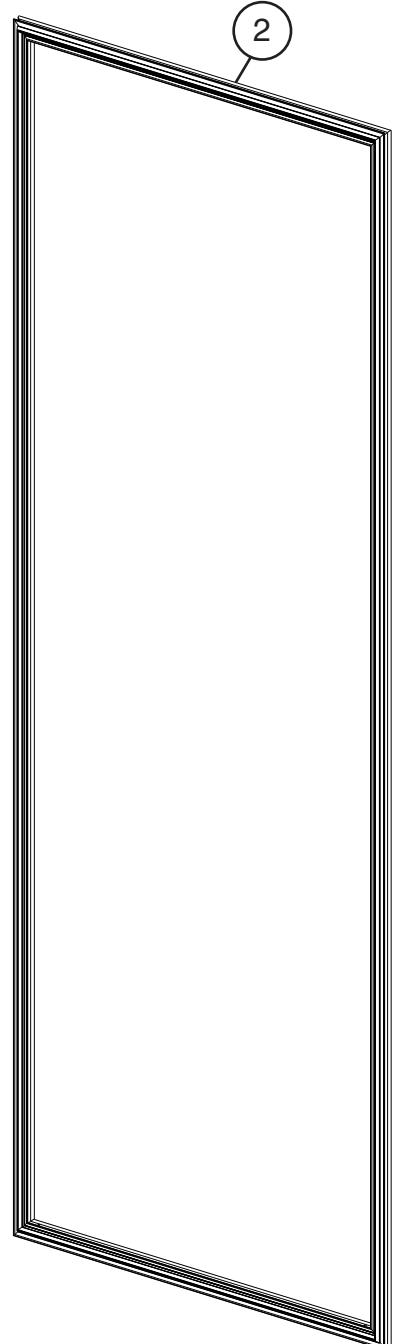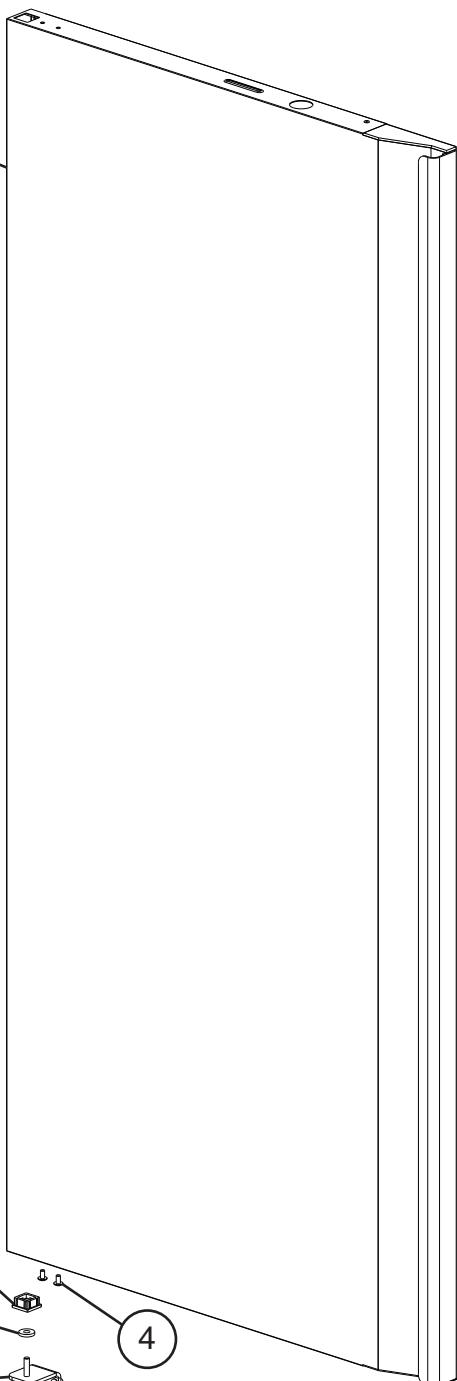


Title: D. Door-Full Solid Model: Full Solid						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
1	Right Door Assembly (includes items 2 through 5)	All Except _2A-FSN	2A7814G01	1		
		_2A-FSN	2B0189G01	1		
	Left Door Assembly (includes items 2 through 5)	All Except _2A-FSN	2A7817G01	1		
		_2A-FSN	2B0191G01	1		
2	Gasket	All Except _2A-FSN	2A5192-23	1		
		_2A-FSN	2A5192-26	1		
3	Spring Cartridge		3A9206-01	1		
3a	Spring Cartridge Screw	5x20, SS	7C42-0520	2		
4	Truss Head Screw (Filler Screw)	5x10, SS	7C32-0510	2		
5	Nylon Bearing		4A5232-01	1		
6	Lower Hinge Bracket		3A9767G01	1		
6a	Truss Head Screw	5x12, SS	7C32-0512	2		
7	Thrust Washer		4A5234-01	1		
8	Upper Hinge Bracket		3A9689-01	1		
8a	Truss Head Screw	5x12, SS	7C32-0512	2		
9	Upper Hinge Bracket Washer		4A5231-01	1		
10	Upper Hinge Bracket Screw		4A5230-01	1		

## E. Door-Half Glass

Right Hinged


1/2

H-5 to Q-5

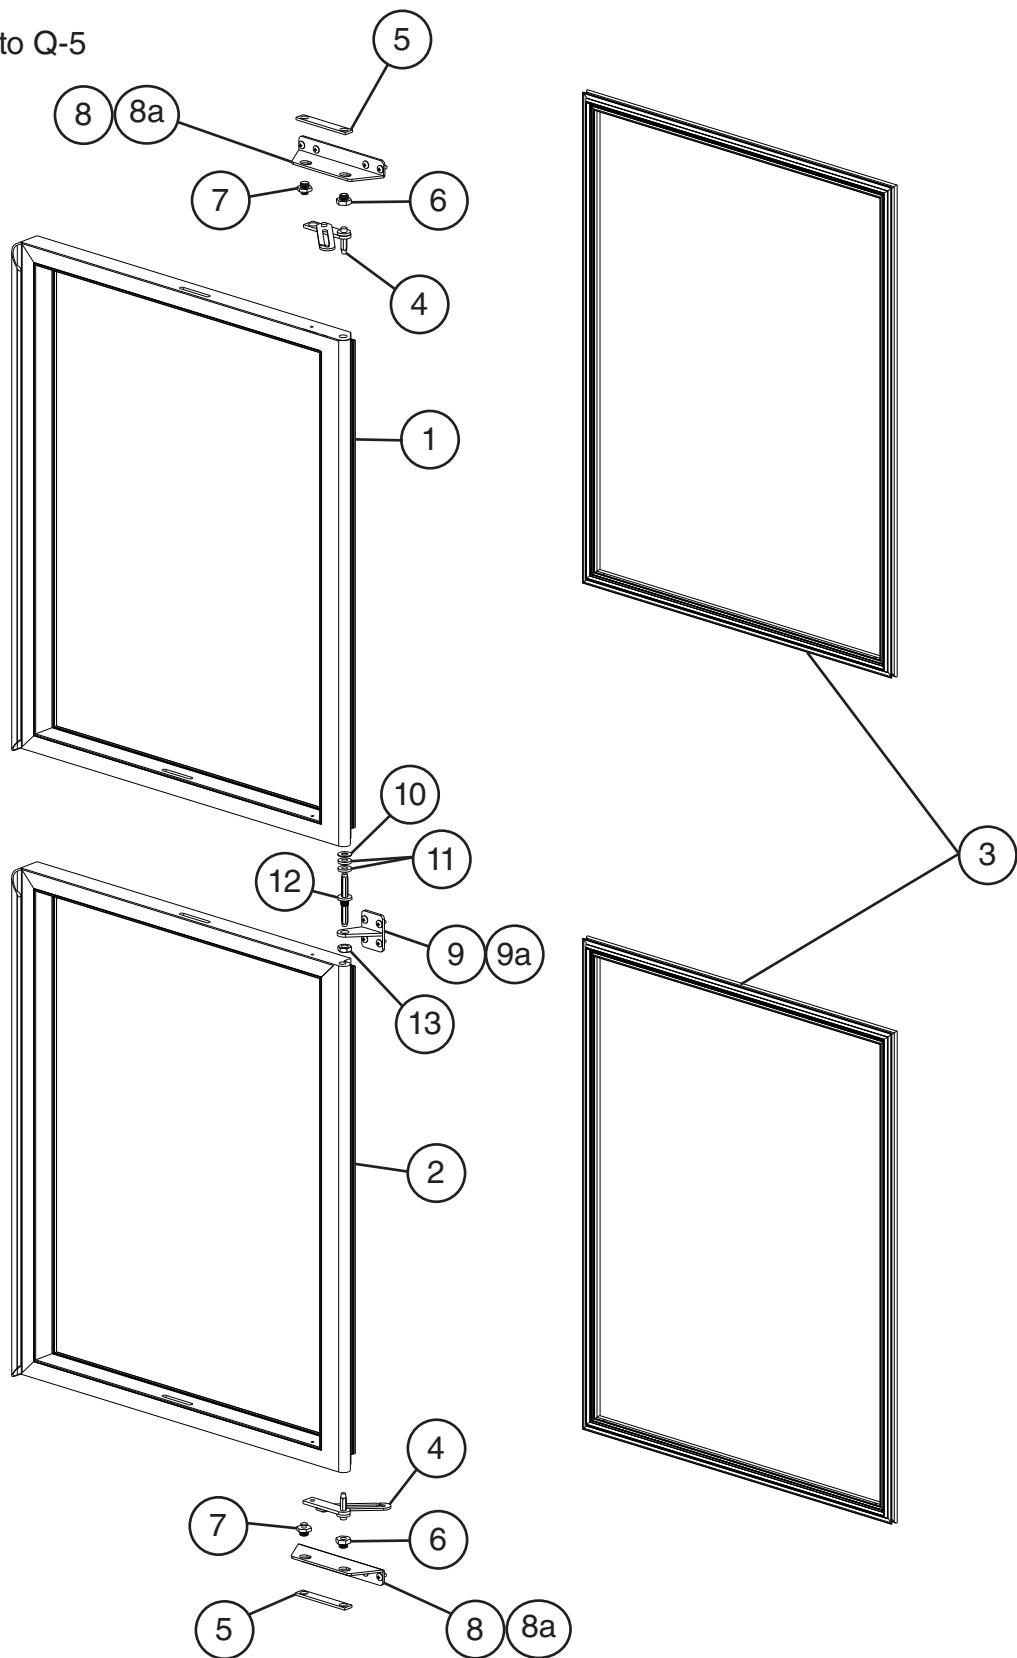

**E. Door-Half Glass  
Left Hinged  
2/2**


H-5 to Q-5

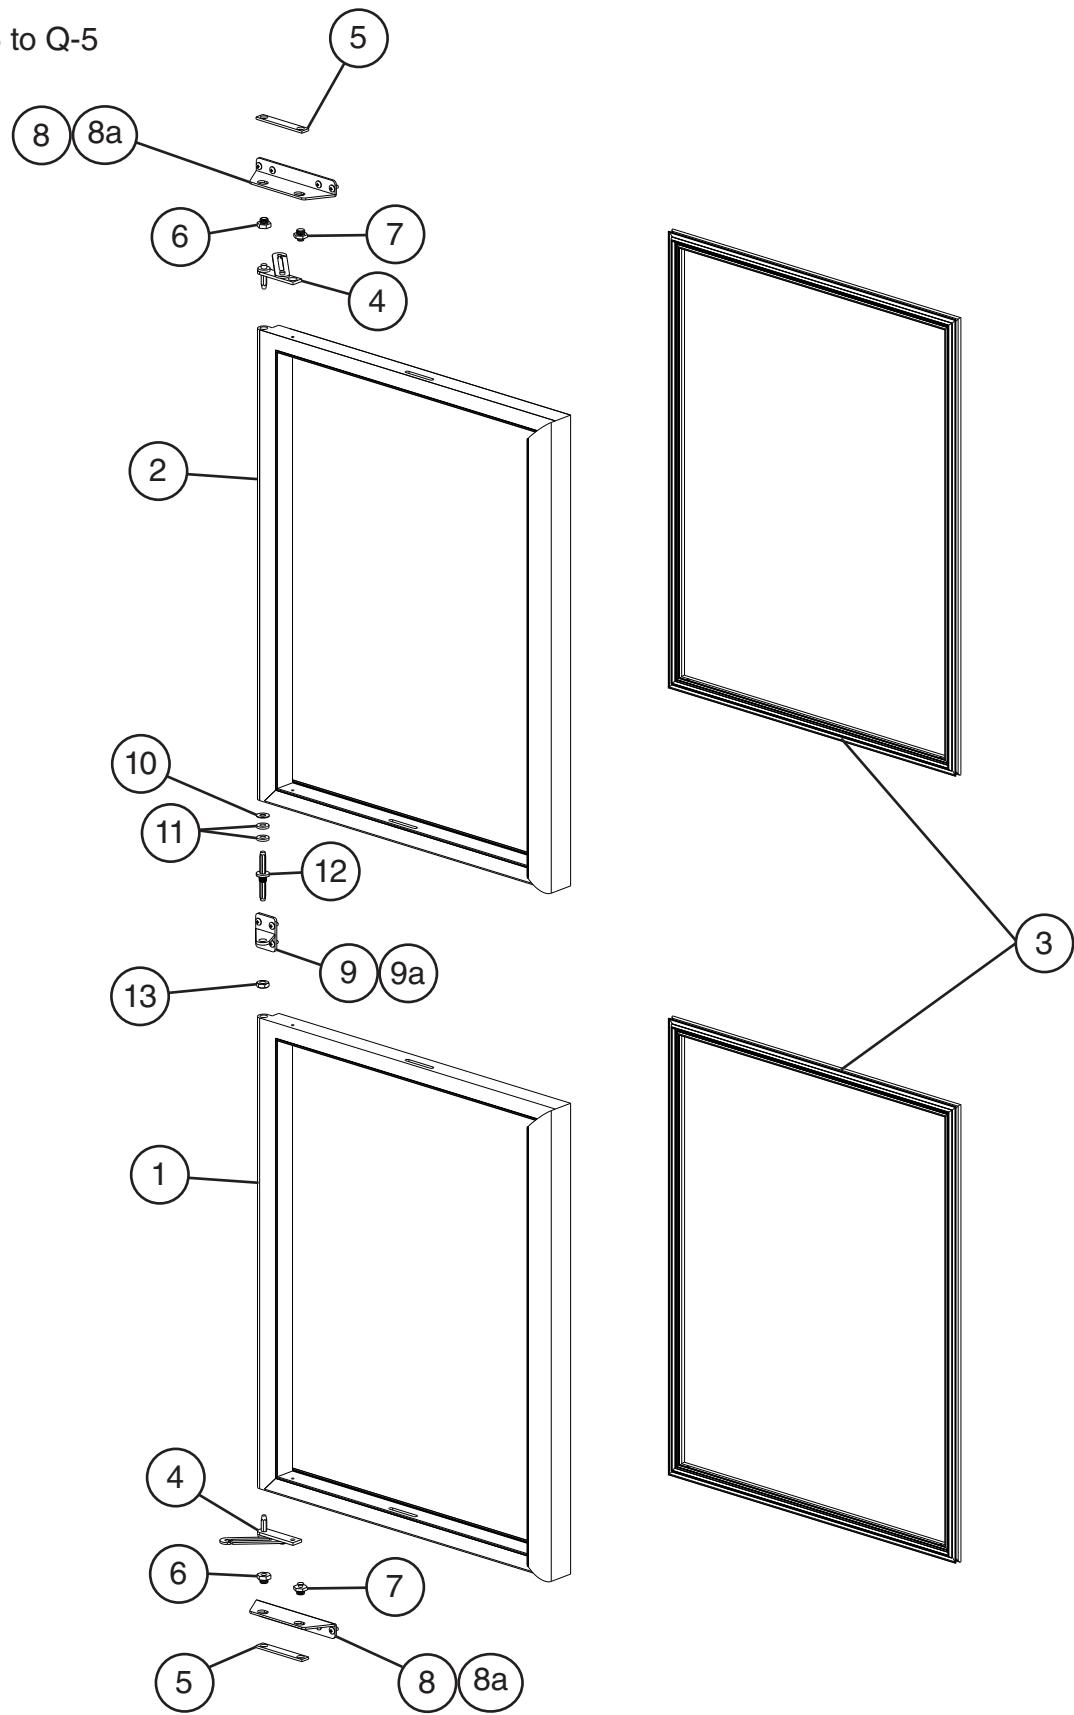

Title: E. Door-Half Glass Model: Half Glass						
Index No.	Description	Material or Model Number	Part Number	Required Number		
				H-5 to Q-5		
1	Upper Right/Lower Left Door Assembly (includes half the quantity of items 3 and 4)	R_A-HG	2A8649-01	1		
		F_A-HG	2A8649-02	1		
2	Lower Right/Upper Left Door Assembly (includes half the quantity of items 3 and 4)	R_A-HG	2A8649-03	1		
		F_A-HG	2A8649-04	1		
3	Gasket		3B0450-01	1		
4	Hinge Arm		3A7946-05	2		
5	Backer Plate		3A7946-08	2		
6	Hinge Bushing		3A7946-05	2		
7	Slide Pin		3A7946-11	2		
8	Hinge Bracket		3A9161-01	2		
8a	Truss Head Screw	5x12, SS	7C32-0512	8		
9	Middle Hinge Bracket		4A6223G01	1		
9a	Truss Head Screw	5x12, SS	7C32-0512	4		
10	Middle Hinge Washer		4A6243-01	1		
11	Nylon Washer		3A7946-10	2		
12	Hinge Pin		3A9858-01	1		
13	Hinge Pin Lock Nut		3A7946-05	1		

**F. Door-Half Solid  
Right Hinged  
1/2**

H-5 to Q-5

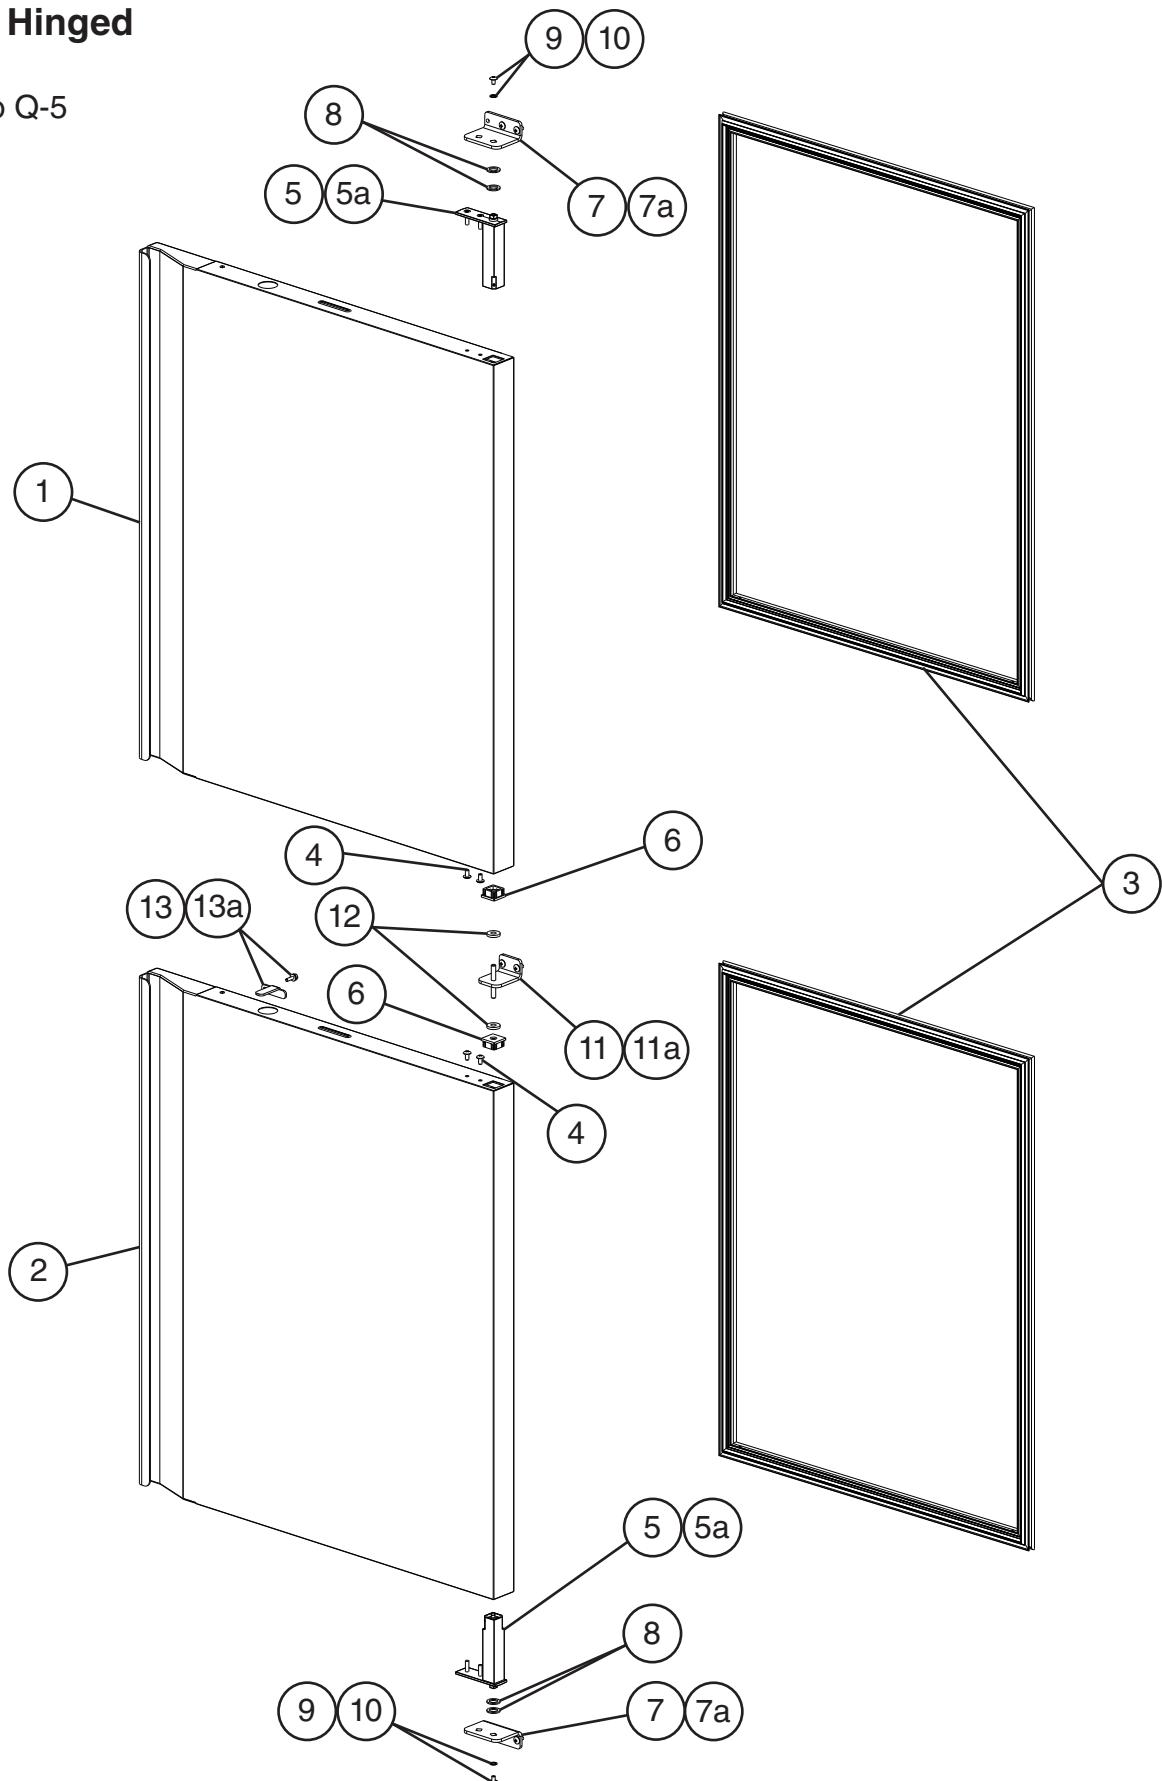


## F. Door-Half Solid

### Left Hinged

2/2

H-5 to Q-5

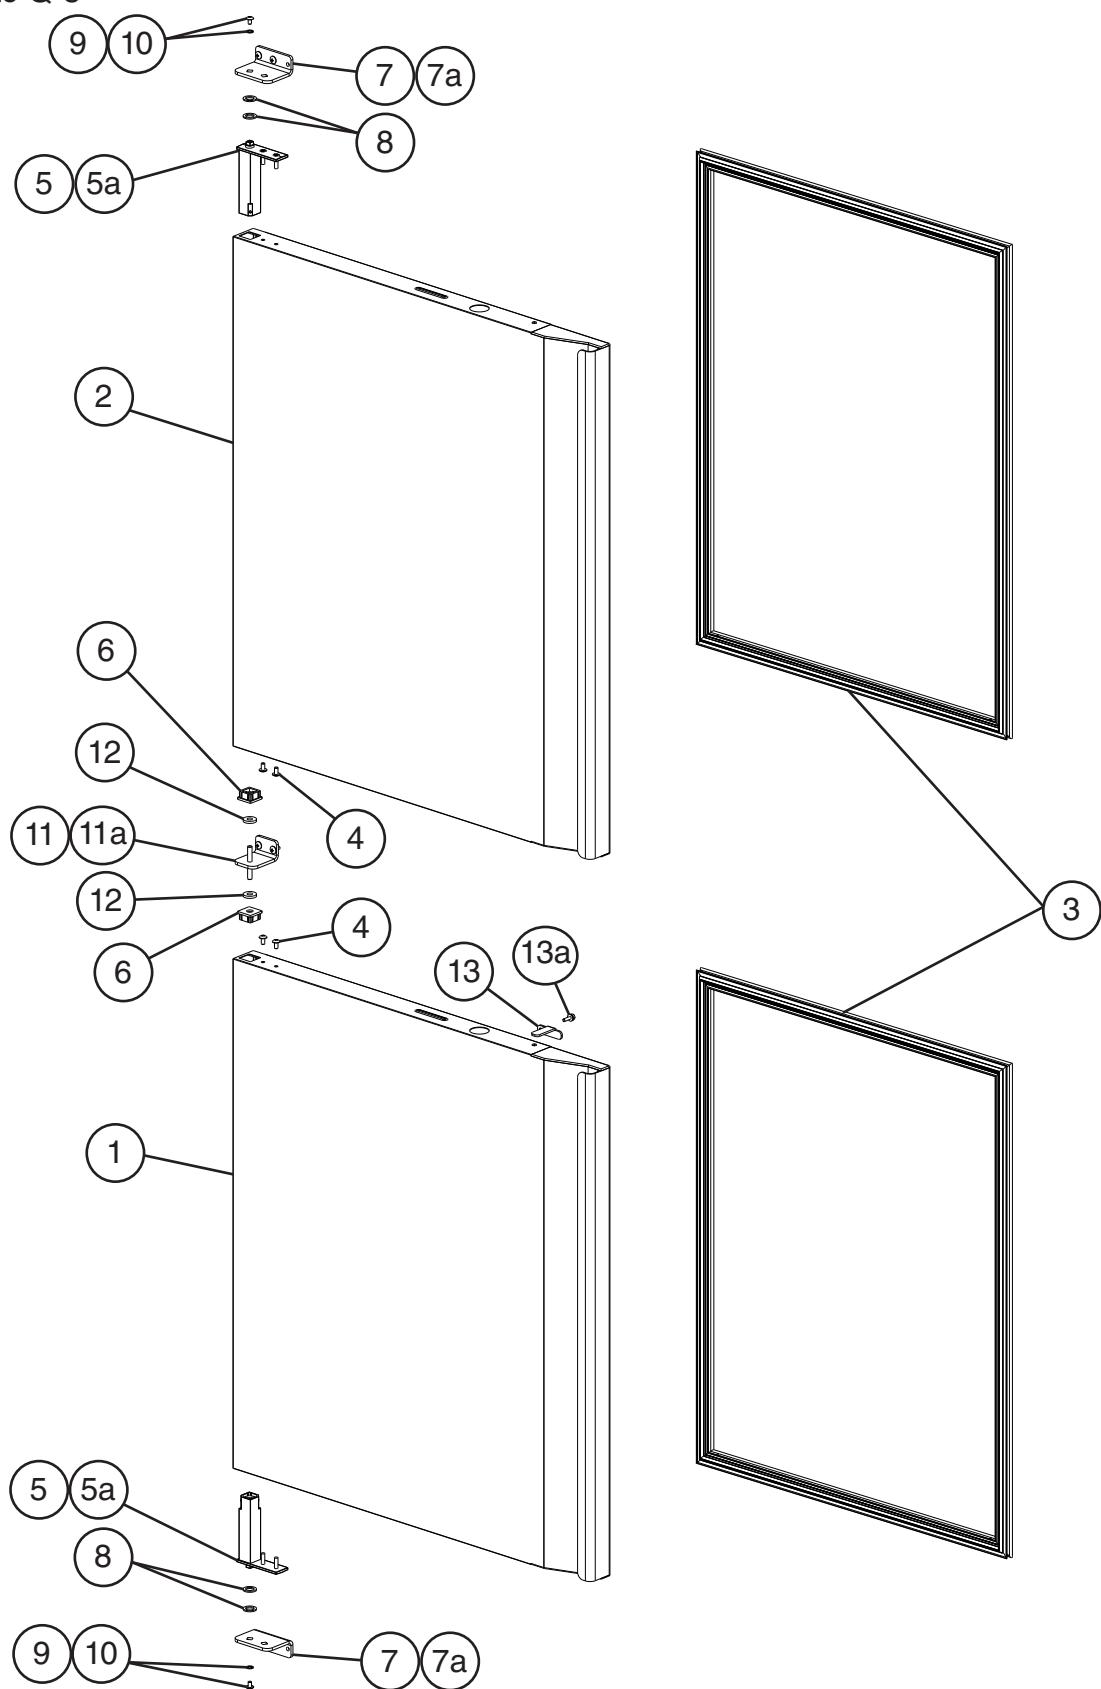

**Title: F. Door-Half Solid Model: Half Solid**




Index No.	Description	Material or Model Number	Part Number	Required Number							
				H-5 to Q-5							
1	Upper Right/Lower Left Door Assembly (includes half the quantity of items 3 through 6)		2A7837G01	1							
2	Lower Right/Upper Left Door Assembly (includes half the quantity of items 3 through 6)		2A7838G01	1							
3	Gasket		2A5192-24	2							
4	Truss Head Screw (Filler Screw)	5x10, SS	7C32-0510	4							
5	Spring Cartridge		3A9206-01	2							
5a	Spring Cartridge Screw	5x20, SS	7C42-0520	4							
6	Nylon Bearing		4A5232-01	2							
7	Upper/Lower Hinge Bracket		3A9689-01	2							
7a	Truss Head Screw	5x12, SS	7C32-0512	4							
8	Thrust Washer		4A5233-01	4							
9	Lock Washer		4A5231-01	2							
10	Screw		4A5230-01	2							
11	Middle Hinge Bracket		3A9767G01	1							
11a	Truss Head Screw	5x12, SS	7C32-0512	2							
12	Thrust Washer		4A5234-01	2							
13	Half-Door Lock		4A5249-01	1							
13a	Bolt		7B0230516	1							

## G. Accessories & Labels


1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL,

2A-FG/FGN/FS/HG/HS, 3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS

H-5 to Q-5

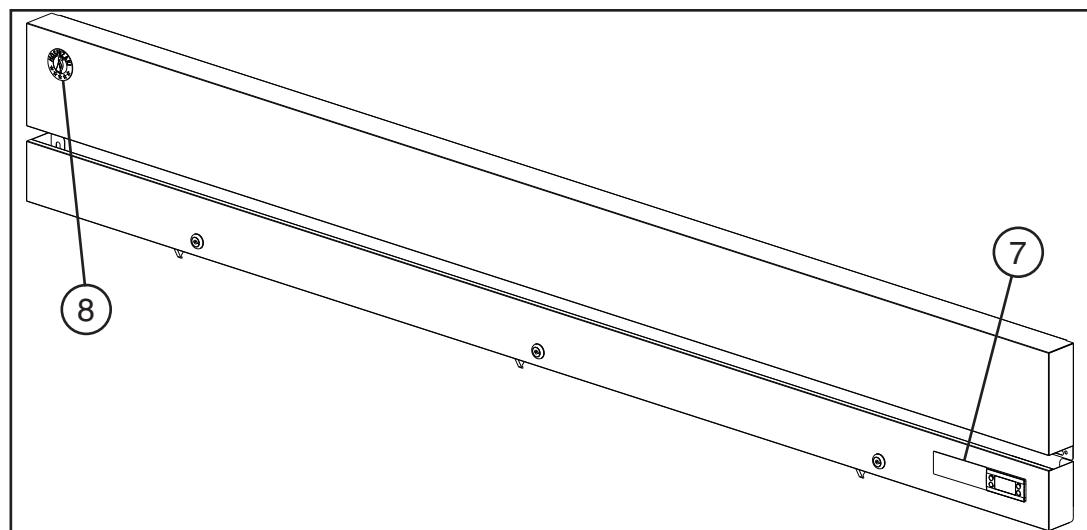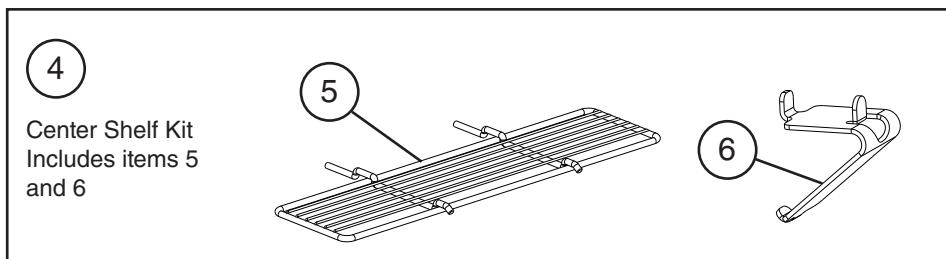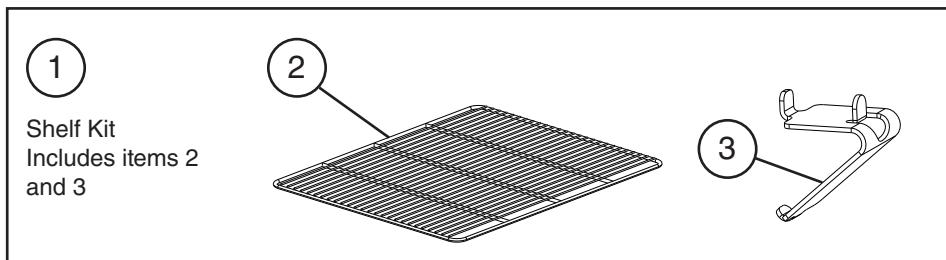


Stem Caster

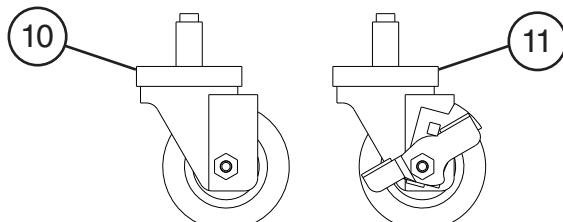

Item 9 Stem Caster Kit  
Includes 2 non-locking stem casters and 2 locking stem casters

Stem Caster Shim

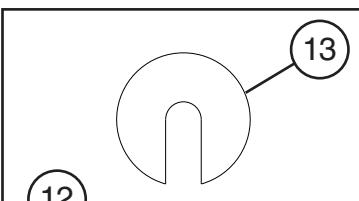

Item 12 Stem Caster Shim Kit  
Includes 6 stem caster shims

Title: G. Accessories & Labels		Model: _1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL, _2A-FG/FGN/FS/HG/HS, _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS		Required Number								
Index No.	Description	Material or Model Number	Part Number	H-5 to Q-5								
				1	2	3	4	5	6	7	8	
1	Shelf Kit (3 Pack) (includes items 2 and 3)	_1A-XXXX	3A6902A01 (HS-5053)	1								
	Shelf Kit (3 Pack) (one kit includes half of items 2 and 3)	_2A-XXXX		2								
	Shelf Kit (3 Pack) (one kit includes a third of items 2 and 3)	_3A-XXXX		3								
	Shelf Kit (3 Pack) (one kit includes a sixth of items 2 and 3)	_3A-FGCL/ FGCR/FSCL/ FSCR		6								
2	Shelf	R1A-FGCL/ FGCR	3A6876-03 (HS-5052)	6								
		_1A-XXXX		3								
		_2A-XXXX		6								
		_3A-XXXX		9								
		_3A-FGCL/ FGCR/FSCL/ FSCR		18								
3	Shelf Clip	R1A-FGCL/ FGCR	428957-01	4								
		_1A-XXXX		12								
		_2A-XXXX		24								
		_3A-XXXX		36								
		_3A-FGCL/ FGCR/FSCL/ FSCR		72								
4	Center Shelf Kit (3 Pack) (includes items 5 and 6)	_2A-XXXX	3A4451A01 (HS-3510)	1								
	Center Shelf Kit (3 Pack) (one kit includes half of items 5 and 6)	_3A-XXXX	3A9920A01 (HS-5389)	2								
	Center Shelf Kit (3 Pack) (one kit includes fourth of items 5 and 6)	_3A-FGCL/ FGCR/FSCL/ FSCR		4								
5	Center Shelf	_2A-XXXX	2A1579-01 (HS-3509)	3								
		_3A-XXXX	2A8875-01 (HS-5388)	6								
		_3A-FGCL/ FGCR/FSCL/ FSCR		12								
6	Shelf Clip	_2A-XXXX	428957-01	3								
		_3A-XXXX		6								
		_3A-FGCL/ FGCR/FSCL/ FSCR		12								
7	Hoshizaki Label		4A6943-01	1								
8	Penguin Label		475552L02	1								

Title: G. Accessories & Labels		Model: _1A-FG/FGCL/FGCR/FS/FSJ/FSL/FSLJ/HG/HS/HSL, _2A-FG/FGN/FS/HG/HS, _3A-FG/FGCL/FGCR/FS/FSCL/FSCR/HG/HS		Required Number										
Index No.	Description	Material or Model Number	Part Number	H-5 to Q-5										
<b>Stem Caster</b>														
9	4-inch Stem Caster Pack (includes 1 locking caster and 1 non-locking caster)	_1A-XXXX	4A1347-03	2										
		_2A-XXXX (HS-3546)		4										
10	4" Non-Locking Caster	_3A-XXXX (HS-5474)	4A1347-01	2										
		_1A-XXXX		4										
		_2A-XXXX												
11	4" Locking Caster	_3A-XXXX	4A1347-02	2										
		_1A-XXXX		4										
		_2A-XXXX												
12	Stem Caster Shim Kit (includes item 13)	_3A-XXXX	HS-3590	1										
		_1A-XXXX		2										
		_2A-XXXX												
13	Stem Caster Shim	_3A-XXXX	4A3658-01	6										
		_1A-XXXX		12										
		_2A-XXXX												